

LED line LITE


Code: 209961

EAN: 5905378209961

LED line LITE Downlight EASY FLEX
18W 4000K 1530lm round white



Downlight EASY FLEX 18W 4000K is a round LED setting by LED line LITE, producing a 1530 lumen light stream. It has a light angle of 120°, providing a wide distribution of light in the rooms. Powered by 220-240V AC voltage, it is characterized by high energy efficiency, reaching class E. In addition, it features Ra color rendering rate of 80 and IK05 impact resistance.

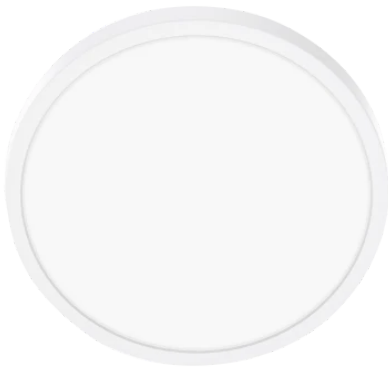

Technical data

Parameter	Value
Voltage	• 220-240 V AC
Luminous efficacy	85
Energy efficiency class 2019/2015	E
Luminous flux	1530
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
IP protection rating	IP20
Survival factor	0.9
Lifetime L70B50	30 000 h
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	White
The lumen maintenance factor	96
Fixture's diameter	225

Parameter	Value
Beam angle	120
LED type	SMD2835
LED quantity	43
Number of on/off cycles	15000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-20÷40
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-180
IEC protection class	II
IK protection rating	05
Lamp's warm-up time to 60%	1 s
Correlated colour temperature	• 4000 K
Power	• 18 W

LED line LITE


Code: 209961

EAN: 5905378209961

**LED line LITE Downlight EASY FLEX
18W 4000K 1530lm round white**

Technical drawing


Light distribution




Additional product photos




Logistics data



Single packaging



Bulk packaging



Europallet

LED line LITE

Code: 209961

EAN: 5905378209961

**LED line LITE Downlight EASY FLEX
18W 4000K 1530lm round white**

Example application