

LED line PRIME

Code: 204508

EAN: 5905378204508

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 30*90° white



Technical data

Parameter	Value
Sling length	200
Luminous efficacy	130 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	C
Luminous flux	2600 lm
Colour consistency in McAdam ellipses	≤6
Standby power	0
IP protection rating	IP20
Warranty (years)	5
Dimmable function	0-10
Survival factor	0.9
Lifetime L70B50	50 000
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80

Parameter	Value
The lumen maintenance factor	96 %
Beam angle	30 x 90 °
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45 °C
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1
Length	586 mm
Width	70 mm
Height	52 mm
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K

LED line PRIME

Code: 204508


EAN: 5905378204508

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 30*90° white




Dimensions

Light distribution

Additional product photos

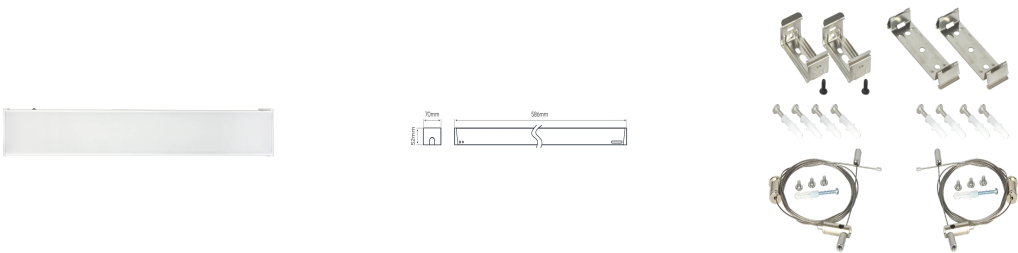

Logistics data



Single packaging

Width	586 mm
Height	52 mm mm
Length	70 mm mm
Weight	1,14 kg kg

Bulk packaging

Number of pieces/tape in meters pack zb	12 szt.
Width	690 mm mm
Height of collective packaging	260 mm
Length	260 mm mm
Weight	13,93 kg kg
Volume	0,046 m3 m3

Europallet

Number of pieces/tapes in meters euro pallet	288
Quantity collective euro pallet	288 szt.
Weight of a euro pallet	672 kg kg
Pallet height	1710 mm
Quantity in 1 layer	48 szt.
Number of layers	6

LED line PRIME

Code: 204508

EAN: 5905378204508

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 0-10V 30*90° white

Example application