

LED line PRIME

Code: 204508

EAN: 5905378204508

**Linear luminaire FUSION 4000K 20W
2600lm 30*90° IP20 60cm white PRIME
0-10V**



FUSION 20W LED line PRIME is an innovative lighting solution that provides a 2600 lm light stream with 130 lm/W efficiency. It is characterized by colour temperature 4000K, which guarantees neutral, natural light. Thanks to optional 0-10V control and various lenses with adjustable distribution angle (30° x 90°) allows flexible adjustment to the needs of users.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	30 x 90
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME

Code: 204508

EAN: 5905378204508


**Linear luminaire FUSION 4000K 20W
2600lm 30*90° IP20 60cm white PRIME
0-10V**

Technical drawing






Light distribution

Additional product photos

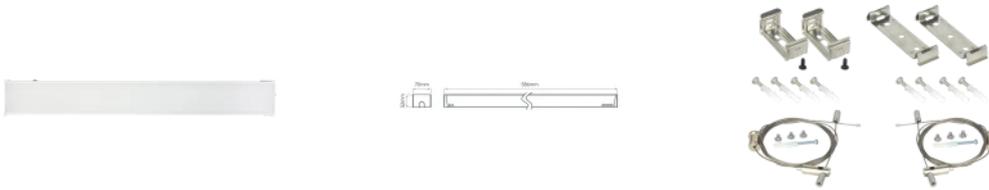

Logistics data



Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 204508

EAN: 5905378204508

**Linear luminaire FUSION 4000K 20W
2600lm 30*90° IP20 60cm white PRIME
0-10V**

Example application