LED line PRIME

Code: 228054

EAN: 5905378228054

Downlight CALMOS PRO 5CCT (2.7/3/4/5/6K) 12/15W 1800lm 60° round IP65 White UGR<19 PRIME



New

The Calmos 5CCT PRO downlight by LED line is an innovative and economical solution for professional applications, offering five color temperatures and two power levels in one fixture. Thanks to the recessed light source, you gain high visual comfort without glare (UGR<19) and a precise beam angle of 60 degrees. Four different sizes and a reliable external power supply make it easy to adapt the lighting to any project, and the 5-year warranty will give you complete peace of mind. It’s the perfect way to reduce inventory and maximize work flexibility for the installer.

IP 65 | IK 06 | 220-240V AC

Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	5
Power	• 12 W • 15 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 2700 K • 3000 K • 4000 K • 5000 K • 6000 K
Colour of the light	CCT
Colour rendering index Ra	80
IP protection rating	IP65
IK protection rating	06
IEC protection class	II

Parameter	Value
Luminous efficacy	120
Luminous flux	1800
Lifetime L70B50	50 000 h
Frequency of the supply voltage	50/60Hz
Beam angle	60°
Power Factor	>=0,9
Ambient temperature suitable for operation	`-20 ~45
Mounting hole diameter	Ø 110-130 mm
Height	77 mm
Fixture's diameter	140 mm

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line PRIME

Code: 228054

EAN: 5905378228054

Downlight CALMOS PRO 5CCT (2.7/3/4/5/6K) 12/15W 1800lm 60° round IP65 White UGR<19 PRIME

Technical drawing



Light distribution

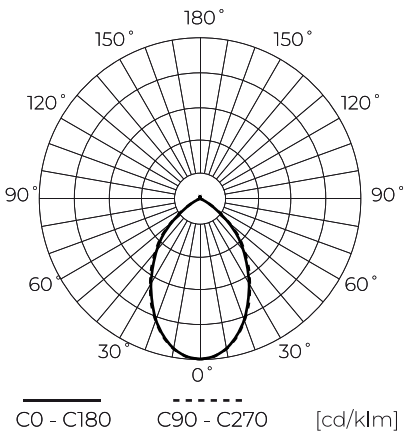

Additional product photos



Logistics data

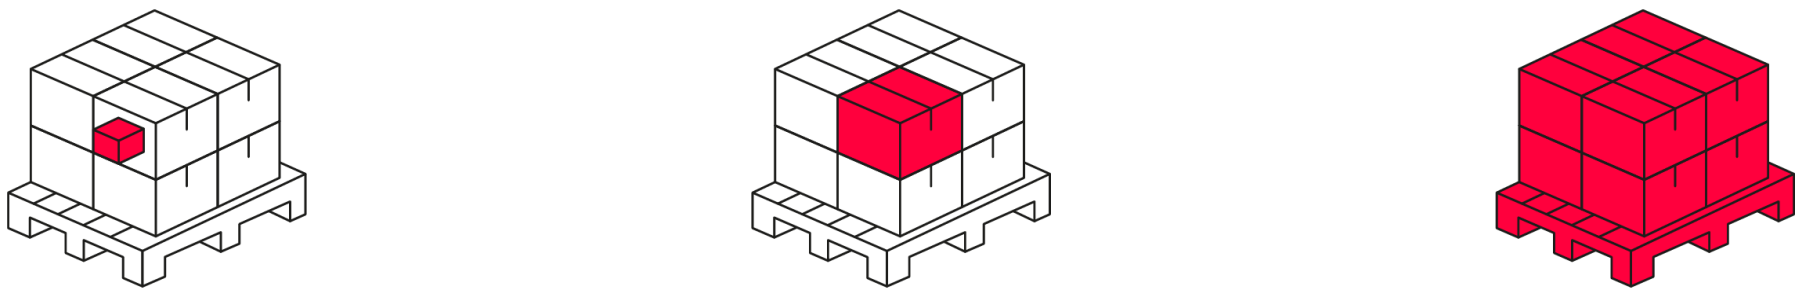

Single packaging

Width	160 mm
Height	100 mm
Length	160 mm
Weight	0,36 kg

Bulk packaging

Quantity	24
Width	335 mm
Height	425 mm
Length	500 mm
Weight	8,64 kg

Europallet

Quantity	216
Height	1,6 m
Bulk quantity	24
Weight	120 kg

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line PRIME

Code: 228054

EAN: 5905378228054

Downlight CALMOS PRO 5CCT (2.7/3/4/5/6K) 12/15W 1800lm 60° round IP65 White UGR<19 PRIME

Example application

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**