


LED line PRIME

Code: 479662

EAN: 5907777479662

LED line PRIME Linear fixture FUSION
60W 4000K 7800lm 0-10V 120*120°
black

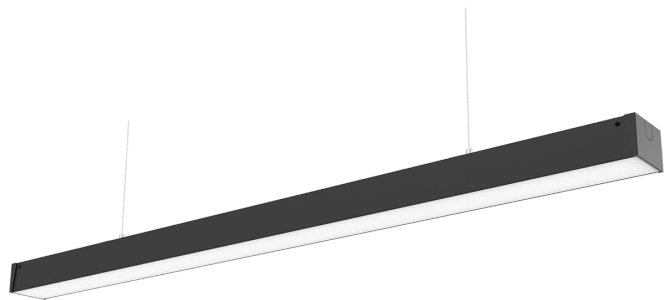

Technical data

Parameter	Value	Parameter	Value
Sling length	200	The lumen maintenance factor	96 %
Luminous efficacy	130 lm/W	Power Factor	0,9
Colour of the light	White	Ambient temperature suitable for operation	-20÷45 °C
Energy efficiency class 2019/2015	C	For indoor use	Inside
Luminous flux	7800 lm	IEC protection class	I
Colour consistency in McAdam ellipses	≤6	IK protection rating	08
IP protection rating	IP20	Lamp's warm-up time to 60%	1
Warranty (years)	5	Length	1444 mm
Dimmable function	0-10	Width	70 mm
Survival factor	0.9	Height	52 mm
Lifetime L70B50	50 000	Power	• 60 W
Mounting type	mixed	Voltage	• 220-240 V AC
Frequency of the supply voltage	50/60Hz	Correlated colour temperature	• 4000 K
Colour rendering index Ra	80		

LED line PRIME

Code: 479662

EAN: 5907777479662

LED line PRIME Linear fixture FUSION
60W 4000K 7800lm 0-10V 120*120°
black


Dimensions

Light distribution

Additional product photos




Logistics data




Single packaging

Width	1444 mm
Height	52 mm mm
Length	70 mm mm
Weight	1,97 kg kg



Bulk packaging

Number of pieces/tape in meters pack zb	12 szt.
Width	1550 mm mm
Height of collective packaging	260 mm
Length	260 mm mm
Weight	23,89 kg kg
Volume	0,104 m3 m3
	60



Europallet

Number of pieces/tapes in meters euro pallet	144
Quantity collective euro pallet	144 szt.
Weight of a euro pallet	286,8 kg kg
Pallet height	1550 mm
Quantity in 1 layer	144 szt.
Number of layers	1

LED line PRIME

Code: 479662

EAN: 5907777479662

**LED line PRIME Linear fixture FUSION
60W 4000K 7800lm 0-10V 120*120°
black**

Example application