

LED line PRIME

Code: 203273

EAN: 5905378203273

LED line PRIME FUSION linear lamp
60W 4000K 7800lm PC Cover 120°
white



product_card.label_technical_data

Parameter	Value
Sling length	200
Luminous efficacy	130 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	C
Luminous flux	7800 lm
Colour consistency in McAdam ellipses	≤6
Standby power	0
IP protection rating	IP20
Warranty (years)	5
Survival factor	0.9
Lifetime L70B50	50 000
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80

Parameter	Value
The lumen maintenance factor	96 %
Beam angle	120 °
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45 °C
For indoor use	Inside
IEC protection class	I
Lamp's warm-up time to 60%	1
Length	1444 mm
Width	70 mm
Height	52 mm
Power	60 W
Voltage	220-240 V AC
Correlated colour temperature	4000 K

LED line PRIME

Code: 203273


EAN: 5905378203273

LED line PRIME FUSION linear lamp
60W 4000K 7800lm PC Cover 120°
white


product_card.label_dimensions

product_card.label_curve_light

product_card.label_product_gallery

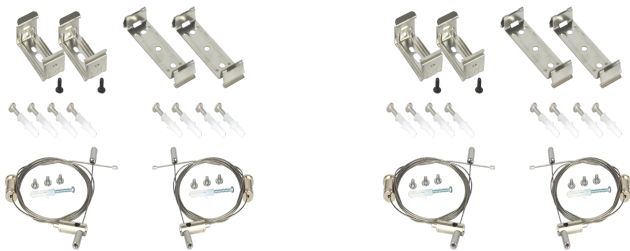


product_card.label_logistic_data




Single packaging

Width	1444 mm
Height	52 mm mm
Length	70 mm mm
Weight	1,97 kg kg



Bulk packaging

Number of pieces/tape in meters pack zb	12 szt.
Width	1550 mm mm
Height of collective packaging	260 mm
Length	260 mm mm
Weight	23,89 kg kg
Volume	0,104 m3 m3



Europallet

Number of pieces/tapes in meters euro pallet	144
Quantity collective euro pallet	144 szt.
Weight of a euro pallet	286,8 kg kg
Pallet height	1550 mm
Quantity in 1 layer	144 szt.
Number of layers	1

LED line PRIME

Code: 203273

EAN: 5905378203273

**LED line PRIME FUSION linear lamp
60W 4000K 7800lm PC Cover 120°
white**

Example application