

LED line LITE



Code: 210004

EAN: 5905378210004

LED line LITE Downlight EASY FLEX 18-21-24W CCT 2110lm round white



Downlight EASY FLEX 18-21-24W CCT is a modern LED line LITE lighting luminaire, characterized by a luminous flux performance of 2110 lumens. It allows to choose colour temperature in the range 3000 K, 4000 K and 5000 K, which provides flexibility in space arrangement. IP20 seal class guarantees protection against solid bodies larger than 12 mm and the IK05 protection level provides impact resistance.

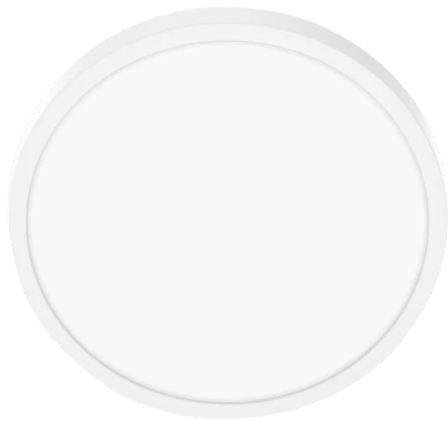

Technical data

Parameter	Value	Parameter	Value
Voltage	• 220-240 V AC	Beam angle	120
Luminous efficacy	88	LED type	SMD2835
Energy efficiency class 2019/2015	E	LED quantity	168
Luminous flux	2110	Number of on/off cycles	15000
Colour consistency in McAdam ellipses	≤6	Colour consistency in McAdam ellipses	≤6
Warranty (years)	3	Ambient temperature suitable for operation	-20÷40
IP protection rating	IP20	Installation method	3in1 surface mounted, flush mounted, suspended
Survival factor	0.9	Mounting hole diameter	65-240
Lifetime L70B50	30 000 h	IEC protection class	II
Frequency of the supply voltage	50/60Hz	IK protection rating	05
Colour rendering index Ra	80	Lamp's warm-up time to 60%	1 s
Colour	White		
The lumen maintenance factor	96	Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Fixture's diameter	300	Power	• 18 W • 21 W • 24 W

LED line LITE


Code: 210004

EAN: 5905378210004


LED line LITE Downlight EASY FLEX 18-21-24W CCT 2110lm round white

Technical drawing


Light distribution




Additional product photos




Logistics data



Single packaging



Bulk packaging



Europallet

LED line LITE

Code: 210004

EAN: 5905378210004

**LED line LITE Downlight EASY FLEX 18-
21-24W CCT 2110lm round white**

Example application