

LED line PRIME


Code: 475466

EAN: 5907777475466

**Linear luminaire FUSION 4000K 20W  
2600lm 120° IP20 60cm black PRIME PC  
Cover**



The LED line PRIME FUSION is an innovative 20W product that emits 2600 lumens at 4000K colour temperature. Its effective design and high light efficiency of 130 lm/W provide excellent lighting conditions. The angle of light transmission is 120°, and its life span is 50,000 hours. IK08 impact resistance and IP20 protection class show robust design.

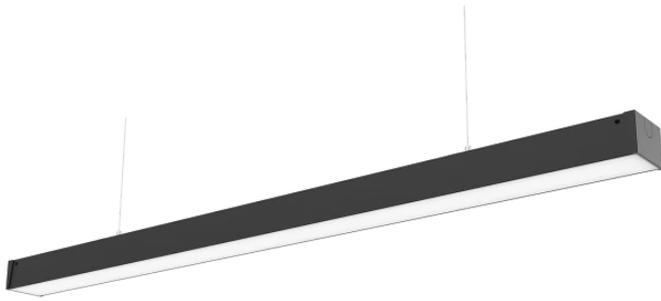

**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	120
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME

Code: 475466


EAN: 5907777475466

**Linear luminaire FUSION 4000K 20W  
2600lm 120° IP20 60cm black PRIME PC  
Cover**

**Technical drawing**






**Light distribution**

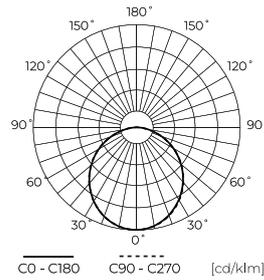

**Additional product photos**



**Logistics data**



**Single packaging**

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

**Bulk packaging**

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	11,5 kg
Comments	

**Europallet**

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

---

LED line PRIME

Code: 475466

EAN: 5907777475466

**Linear luminaire FUSION 4000K 20W  
2600lm 120° IP20 60cm black PRIME PC  
Cover**

---

Example application