


LED line PRIME


Code: 231351

EAN: 5905378231351

Linear fixture FUSION 4000K 20W
2600lm 120° IP20 60cm black PRIME PC
Cover (single)

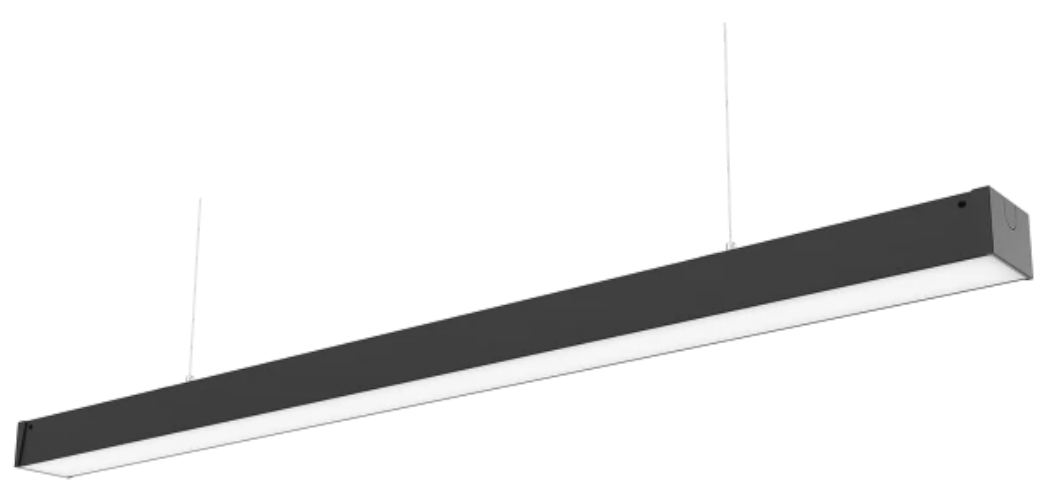

The LED line PRIME FUSION is an innovative 20W product that emits 2600 lumens at 4000K colour temperature. Its effective design and high light efficiency of 130 lm/W provide excellent lighting conditions. The angle of light transmission is 120°, and its life span is 50,000 hours. IK08 impact resistance and IP20 protection class show robust design.

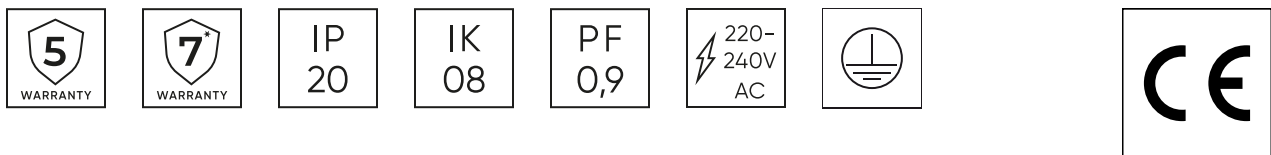

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	120
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME

Code: 231351


EAN: 5905378231351

Linear fixture FUSION 4000K 20W


2600lm 120° IP20 60cm black PRIME PC

Cover (single)

Technical drawing




Light distribution

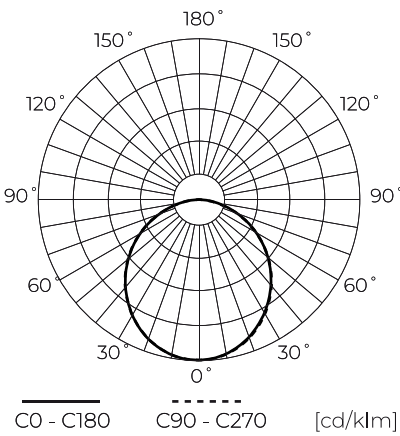

Additional product photos




Logistics data




Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg



Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	11,5 kg
Comments	



Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 231351

EAN: 5905378231351

**Linear fixture FUSION 4000K 20W
2600lm 120° IP20 60cm black PRIME PC
Cover (single)**

Example application