

LED line PRIME


Code: 475725

EAN: 5907777475725

**Linear luminaire FUSION 4000K 20W  
2600lm P18° IP20 60cm black PRIME 0-10V**



The linear FUSION 20W from the PRIME LED line provides light performance of 130 lm/W and a total light stream of 2600 lm at 4000 K colour temperature, resulting in natural and pleasant lighting. Its assembly is simple thanks to the universal shape, which allows a variety of installation methods. Made of aluminium, the luminaire guarantees excellent heat discharge and long-term operation of up to 50,000 hours.

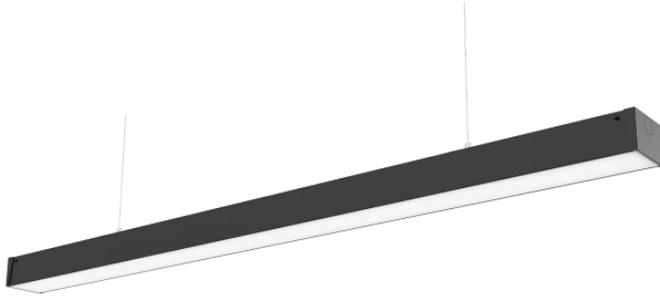

**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	RepIByProf2+RepIByP
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME

Code: 475725


EAN: 5907777475725

**Linear luminaire FUSION 4000K 20W  
2600lm P18° IP20 60cm black PRIME 0-10V**

**Technical drawing**






**Light distribution**

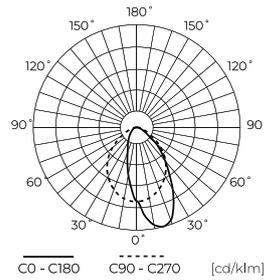

**Additional product photos**



**Logistics data**



**Single packaging**

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

**Bulk packaging**

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

**Europallet**

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

---

LED line PRIME

Code: 475725

EAN: 5907777475725

**Linear luminaire FUSION 4000K 20W  
2600lm P18° IP20 60cm black PRIME 0-  
10V**

---

**Example application**