


LED line® SMD 5W 4000K 400lm 220-260V 50mm



SLIM

The slim design gives the product a modern minimalist appearance and can be installed in limited space.

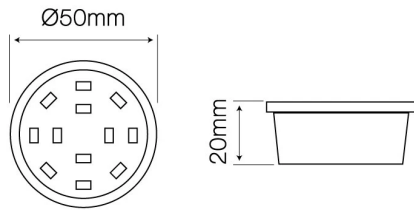

The structural design of this product ensures effective heat dissipation.



Voltage range and voltage type



LED type



Manufacturer issues a 3-year warranty for this product.



Flicker Free



Beam angle




Lifespan


Parameter	Value
Luminous efficacy	80 lm/W
Power	5 W
Colour of the light	White
Energy efficiency class 2019/2015	G
Luminous flux	400 lm
Correlated colour temperature	4000 K
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
Dimmable function	No
Survival factor	0.9
Lifetime L70B50	30 000
Supply voltage range and voltage type	220-260 AC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	white
The lumen maintenance factor	96
Lamp's diameter	50
Beam angle	110 °
Material (cover)	glass
Material (housing)	Ceramic
LED type	SMD2835
Lifespan	30000
Power Factor	0,4

Parameter	Value
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
For indoor use	Inside
Full box quantity	100 pc
Lamp's warm-up time to 60%	1
Height	22 mm
Product weight with packaging (g)	72 g
Master carton weight (kg)	7,2
EPREL ID	632 101
Date of first placement on the market	01.07.2019
Energy class	A+
Angle for useful luminous flux (EPREL)	Wide cone of 120 degrees
Is the product equipped with an integrated light source? (EPREL)	No
Non-directional or directional light source (EPREL)	DLS
Is this product a light source? (EPREL)	Yes
Mains or non- mains light source (EPREL)	MLS
Connected light source (EPREL)	No
Colour-tuneable light source (EPREL)	No
R9 colour rendering index value (EPREL)	5
Total luminous flux (EPREL)	400
On-mode power P _{on} (EPREL)	5
Useful luminous flux Φ _{use} (EPREL)	330

Luminous [cd/klm]




Single packaging



50
60
50
0,75
10


Bulk packaging



Outer box quantity

100 pcs.
100

Europallet



9