

LED line LITE


Code: 209992

EAN: 5905378209992

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
24W 2110lm round IP20 White LITE
motion sensor



Downlight EASY FLEX 24W CCT is a modern round LED panel with a luminous flux of 2110 lumens, providing high light performance of 88 lm/W. Thanks to the possibility of changing the colour of the light in the range 3000 K, 4000 K and 5000 K it is perfectly adapted to different lighting needs. It has a motion sensor with a detection angle of up to 180° and a range of 10 m, as well as characterized by IP20 leak class and IK05 resistance.

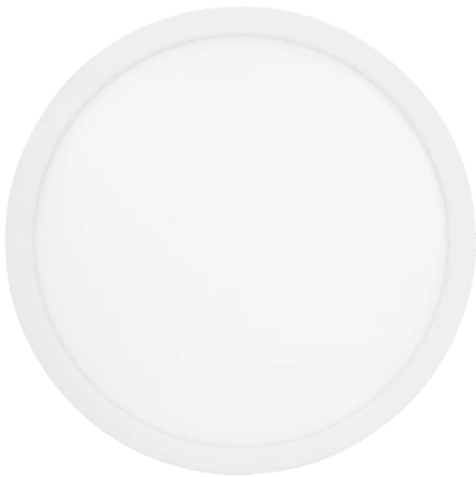

Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	• 24 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	05
IEC protection class	II
Luminous efficacy	88
Luminous flux	2110
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Hold time	60 s.
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD2835
LED quantity	168
Number of on/off cycles	15000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-240
Height	17
Fixture's diameter	300
Colour	White


LED line LITE

Code: 209992


EAN: 5905378209992

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
24W 2110lm round IP20 White LITE
motion sensor

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

Width	31 mm
Height	305 mm
Length	305 mm
Weight	0,56 kg



Bulk packaging

Quantity	10
Width	325 mm
Height	325 mm
Length	335 mm
Weight	8,42 kg



Europallet

Bulk quantity	240
---------------	-----

LED line LITE

Code: 209992

EAN: 5905378209992

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
24W 2110lm round IP20 White LITE
motion sensor**

Example application