

LED line PRIME

Code: 207806

EAN: 5905378207806

**Linear luminaire EXECULINE 4000K
30W 3900lm 96° IP20 120cm white
PRIME**



The EXECULINE linear fixture 30W 4000K 3900lm IP20 white 96° PRIME is an elegant and modern lighting element, characterized by a power of 30 W and a luminous flux of 3900 lm. The color temperature of the light is 4000 K, which provides pleasant, neutral lighting. Made of durable aluminum and light-diffusing material, it guarantees even lighting at an angle of 96°. The lifespan of this fixture is estimated at 50,000 hours.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5
Power	• 30 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	I
Luminous efficacy	130
Luminous flux	3900
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤3
Standby power	0
Mounting type	suspended
Frequency of the supply voltage	50/60Hz
Beam angle	96
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-15÷45
For indoor use	Inside
Height	60 mm


LED line PRIME

Code: 207806


EAN: 5905378207806

**Linear luminaire EXECULINE 4000K
30W 3900lm 96° IP20 120cm white
PRIME**


Technical drawing



Light distribution

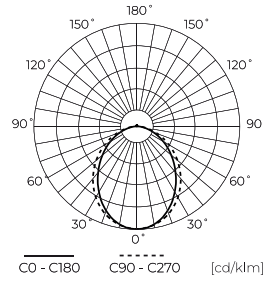

Additional product photos

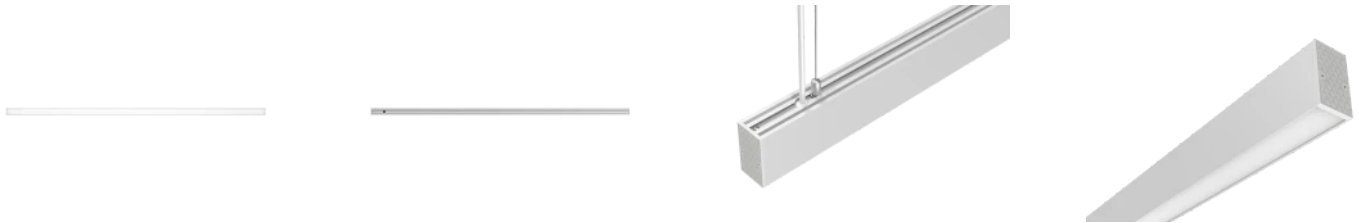

Logistics data



Single packaging

Quantity	1
Width	1250 mm
Height	82 mm
Length	41 mm
Weight	1,1 kg

Bulk packaging

Quantity	10
Width	220 mm
Height	180 mm
Length	1260 mm
Volume	0,049 m3
Weight	11,35 kg
Comments	

Europallet

Height	1800 mm
Quantity in layer	200
Number of layers	10
Bulk quantity	2000
Weight	2270 kg

LED line PRIME

Code: 207806

EAN: 5905378207806

**Linear luminaire EXECULINE 4000K
30W 3900lm 96° IP20 120cm white
PRIME**

Example application

