

LED line LITE


Code: 248313

EAN: 5901583248313

**LED bulb GU10 4000K 5W 410lm 230V
50° Glass LITE**



LITE GU10 5W LED line bulb with a colour temperature of 4000K and a light stream of 410 lumens is an advanced light source that stands out for high performance of 82 lm/W. It is characterized by a lighting angle of 50°, which ensures an effective scattering of the light. The bulb works in a power supply voltage of 220 to 260 V AC, and its lifespan reaches 30,000 hours. There is no flickering effect when using SMD2835 diodes, which protects the eyesight of users.

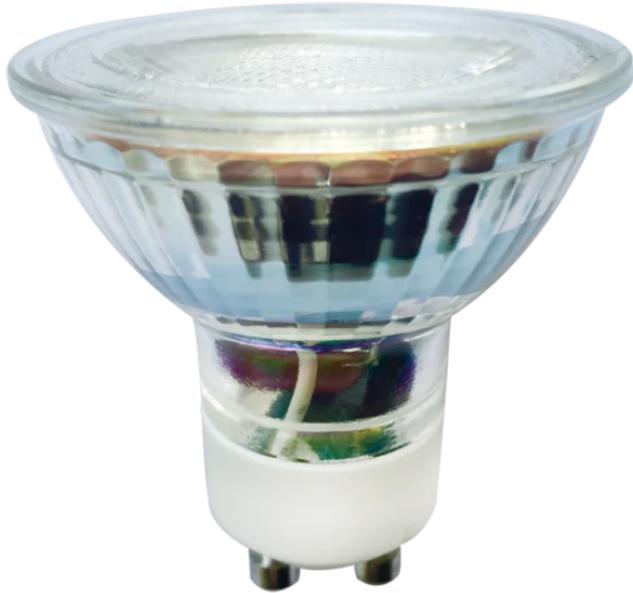

Technical data

Parameter	Value
Energy efficiency class 2019/2015	G
Warranty	3
Power	• 5 W
Voltage	• 220-260 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
Luminous efficacy	82
Luminous flux	410 lm
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6

Parameter	Value
Frequency of the supply voltage	50/60Hz
Beam angle	50°
LED type	SMD2835
Power Factor	0,4
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Height	53
Fixture's diameter	50 mm
Material (housing)	Glass
Material (cover)	glass

LED line LITE


Code: 248313

EAN: 5901583248313

**LED bulb GU10 4000K 5W 410lm 230V
50° Glass LITE**




Technical drawing

Light distribution

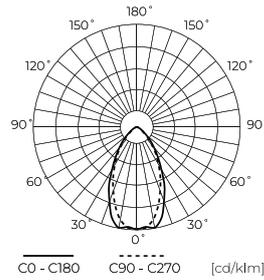

Additional product photos

Logistics data



Single packaging

Quantity	10
Width	50 mm
Height	50 mm
Length	60 mm
Weight	0,07 kg

Bulk packaging

Quantity	100
Width	290 mm
Height	170 mm
Length	595 mm
Volume	0,029 m3
Weight	6,5 kg
Comments	

Europallet

Quantity	4500
Height	1870 mm
Quantity in layer	400
Number of layers	11
Bulk quantity	4400
Weight	286 kg

LED line LITE

Code: 248313

EAN: 5901583248313

**LED bulb GU10 4000K 5W 410lm 230V
50° Glass LITE**

Example application