

LED line LITE

Code: 216785

EAN: 5905378216785

**LED tube NANO T8 G13 4000K 9W  
900lm 230V 270° 60cm PC LITE**



**Nano Fluorescent Lamp** has been designed with durability, safety, and user convenience in mind. Its housing is made of durable plastic, which means it does not break during transport or installation. The absence of glass elements further minimizes the risk of damage and increases safety, especially in areas prone to impacts, such as warehouses, workshops, schools, or garages.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	2
Power	• 9 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
Luminous efficacy	100
Luminous flux	900 lm
The lumen maintenance factor	96
Lifetime L70B50	18 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Lamp's type	T8
Beam angle	270 °
LED type	SMD2835
LED quantity	36
Power Factor	0,5
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
For indoor use	Inside
Material	Plastic
Material (housing)	Polycarbonate


LED line LITE

Code: 216785


EAN: 5905378216785

**LED tube NANO T8 G13 4000K 9W  
900lm 230V 270° 60cm PC LITE**


**Technical drawing**






**Light distribution**

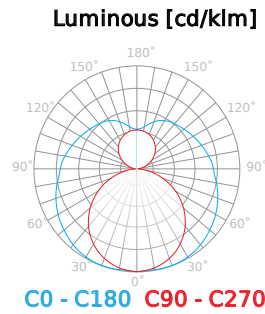

**Additional product photos**

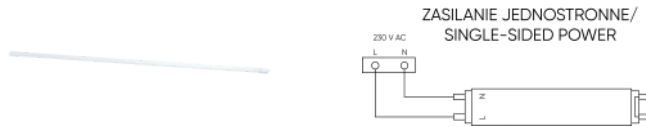

**Logistics data**



**Single packaging**

Quantity	1
Width	36 mm
Height	63 mm
Length	36 mm
Weight	0,12 kg

**Bulk packaging**

Quantity	25
Width	660 mm
Height	175 mm
Length	170 mm
Volume	
Weight	4,1 kg

**Europallet**

Quantity	1800
Height	1850 mm
Quantity in layer	
Number of layers	
Bulk quantity	72
Weight	135 kg

LED line LITE

Code: 216785

EAN: 5905378216785

**LED tube NANO T8 G13 4000K 9W  
900lm 230V 270° 60cm PC LITE**

**Example application**

