

LED line PRIME


Code: 475749

EAN: 5907777475749

**Linear luminaire FUSION 4000K 40W
5200lm 30*90° IP20 120cm black PRIME**



FUSION linear luminaire from LED line PRIME with 40W and 4000K colour temperature emits a light stream of 5200 lumens. It is characterized by efficiency of 130 lm/W and light distribution angles of 30x90°, allowing precise surface illumination. Made of durable aluminum, it ensures long service life and efficient heat discharge. IP20 and IK08 protection classes become a guarantee of reliability in internal applications.

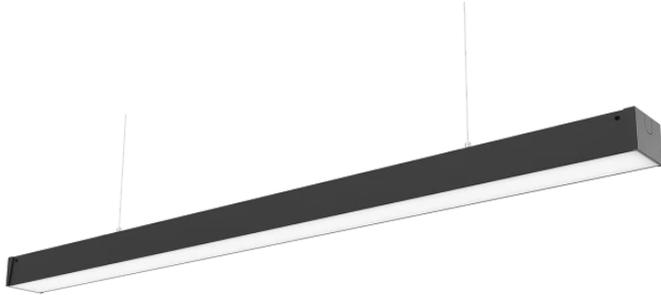

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 475749


EAN: 5907777475749

**Linear luminaire FUSION 4000K 40W
5200lm 30*90° IP20 120cm black PRIME**

Technical drawing





Light distribution



Additional product photos



Logistics data



Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg

Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	22,09 kg
Comments	

Europallet

Quantity	288
Height	1260 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	265,2 kg

LED line PRIME

Code: 475749

EAN: 5907777475749

**Linear luminaire FUSION 4000K 40W
5200lm 30*90° IP20 120cm black PRIME**

Example application