

LED line PRIME


Code: 479679

EAN: 5907777479679

**Linear luminaire FUSION 4000K 60W
7800lm LR40° IP20 150cm black PRIME
0-10V**



The 60W LED line PRIME FUSION linear luminaire and 4000K light color provides an impressive light stream of 7800 lm, which translates into exceptional efficiency of uniform lighting. Thanks to the 0-10V dimming technology and high power factor PF 0.9, the luminaire is energy efficient and environmentally friendly. The solid aluminium body effectively drains heat, increasing product life to 50,000 hours.

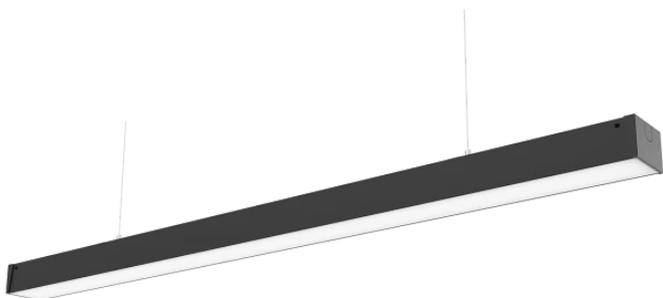

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 479679


EAN: 5907777479679

**Linear luminaire FUSION 4000K 60W
7800lm LR40° IP20 150cm black PRIME
0-10V**

Technical drawing






Light distribution



Additional product photos



Logistics data



Single packaging

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

Europallet

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

LED line PRIME

Code: 479679

EAN: 5907777479679

**Linear luminaire FUSION 4000K 60W
7800lm LR40° IP20 150cm black PRIME
0-10V**

Example application