

LED line PRIME


Code: 204140

EAN: 5905378204140

Linear luminaire FUSION 4000K 40W
5200lm LR40° IP20 120cm white PRIME



The FUSION linear luminaire from the LED line PRIME is a 40W and 5200 lm efficient light source. It is characterized by a colour temperature of 4000K, which provides neutral and pleasant lighting. Made of aluminum, it guarantees excellent heat management, which translates into the longevity of the device. The angle of light distribution is 120° and the PF power factor of 0.9 ensures efficient use of energy.

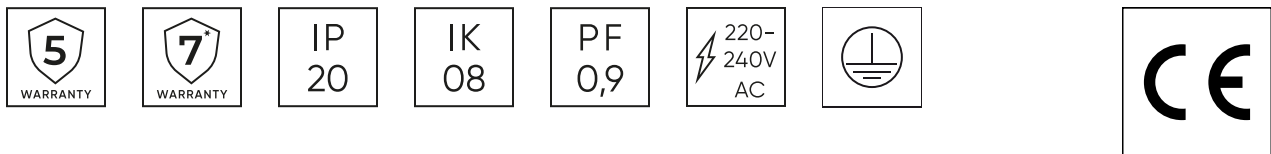

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	40 W
Voltage	220-240 V AC
Correlated colour temperature	4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 204140

EAN: 5905378204140


Linear luminaire FUSION 4000K 40W
5200lm LR40° IP20 120cm white PRIME

Technical drawing




Light distribution

Additional product photos

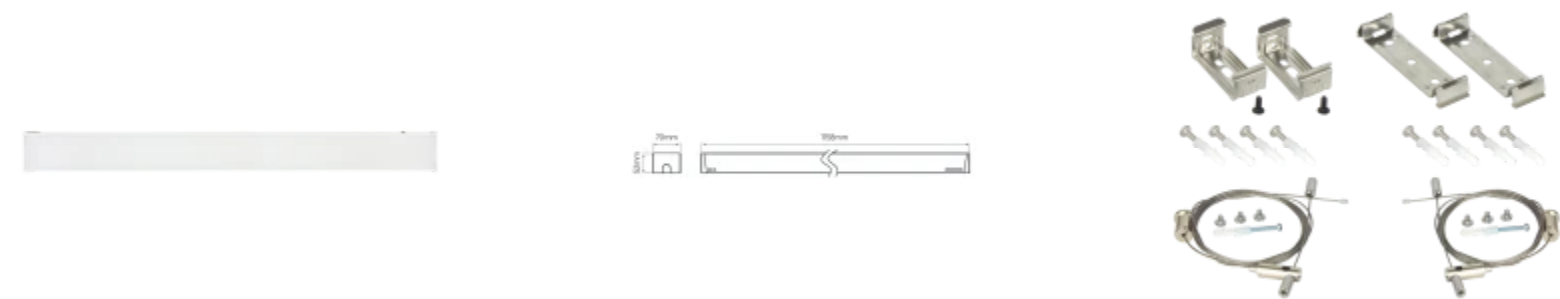


Logistics data




Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg



Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	22,09 kg
Comments	



Europallet

Quantity	144
Height	1260 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	265,2 kg

LED line PRIME

Code: 204140

EAN: 5905378204140

Linear luminaire FUSION 4000K 40W
5200lm LR40° IP20 120cm white PRIME

Example application