

LED line

Code: 470812

EAN: 5907777470812

LED line® High-Bay UFO 200W
150lm/W 4000K 1-10V 120° RAIDER



Technical data

Parameter	Value
Luminous efficacy	150 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	D
Luminous flux	30000 lm
Colour consistency in McAdam ellipses	≤6
IP protection rating	IP65
Warranty (years)	5
Dimmable function	1-10
Survival factor	0.9
Lifetime L70B50	50 000
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	70
Colour	Black
The lumen maintenance factor	96 %
Lamp's diameter	280
Beam angle	120 °
Material (cover)	polycarbonate
Material (housing)	aluminum

Parameter	Value
LED type	SMD3030
LED quantity	280
Lifespan	100000
Power Factor	0,95
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-40÷45 °C
For indoor and outdoor use	YES
IEC protection class	I
IK protection rating	08
Full box quantity	1 pc
Lamp's warm-up time to 60%	1
Height	200 mm
Energy class	A+
Power	• 200 W
Voltage	• 100-277 V AC
Correlated colour temperature	• 4000 K

LED line

Code: 470812


EAN: 5907777470812

LED line® High-Bay UFO 200W


150lm/W 4000K 1-10V 120° RAIDER

Dimensions




Light distribution



Additional product photos

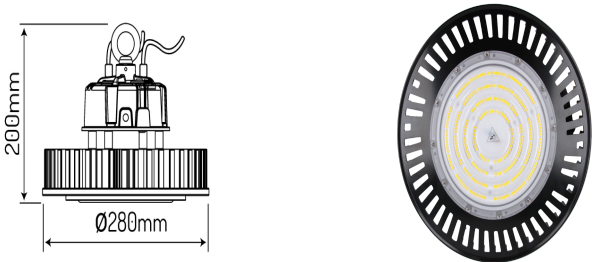

Logistics data



Single packaging

Width	345
Height	200 mm
Length	345 mm
Weight	3,77 kg
	1

Bulk packaging

Number of pieces/tape in meters pack zb	1
Width	345 mm
Height of collective packaging	200
Length	345 mm
Weight	3,77 kg
Volume	0,023 m3

Europallet

Number of pieces/tapes in meters euro pallet	48
Quantity collective euro pallet	48
Weight of a euro pallet	180,96 kg
Pallet height	1744
Quantity in 1 layer	6
Number of layers	8

LED line

Code: 470812

EAN: 5907777470812

**LED line® High-Bay UFO 200W
150lm/W 4000K 1-10V 120° RAIDER**

Example application