


LED line PRIME

Code: 205826

EAN: 5905378205826

LED line PRIME Panel Backlit 34W  
4000K 4760lm 595x595 0-10V

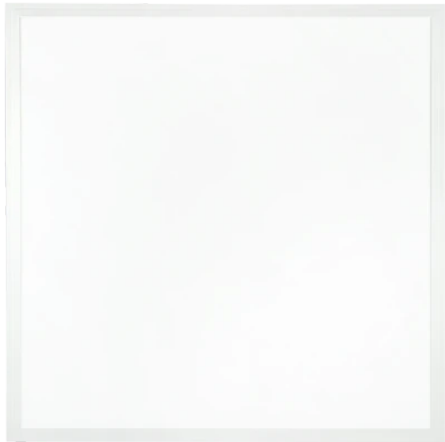

The 34W PRIME LED line panel is an advanced lighting solution, characterized by a light stream of 4760 lm. Thanks to the backlit technology, LEDs placed on the back of the housing ensure uniform light transmission with a light angle of 120°. The high efficiency is 140 lm/W and the color reproduction coefficient Ra reaches 80. The aluminium housing is resistant to deformation and provides a long-lasting life of L70B50 to 70,000 hours.



Technical data

Parameter	Value	Parameter	Value
Voltage	• 200-240 V AC	Beam angle	120
Luminous efficacy	140	Material (cover)	polystyrene
Colour of the light	White	Material (housing)	Aluminium
Energy efficiency class 2019/2015	D	LED type	SMD LED 2835
Luminous flux	4760	LED quantity	72
Colour consistency in McAdam ellipses	≤6	Power Factor	0,9
Warranty (years)	5	Number of on/off cycles	50000
IP protection rating	IP20	Colour consistency in McAdam ellipses	≤6
Dimmable function	0-10	Ambient temperature suitable for operation	-20÷40
Survival factor	0.9	For indoor use	Inside
Lifetime L70B50	0	IEC protection class	II
Frequency of the supply voltage	50/60Hz	IK protection rating	02
Colour rendering index Ra	80	Lamp's warm-up time to 60%	1 s
Colour	white	Correlated colour temperature	• 4000 K
The lumen maintenance factor	96	Power	• 34 W

LED line PRIME

Code: 205826

EAN: 5905378205826

**LED line PRIME Panel Backlit 34W  
4000K 4760lm 595x595 0-10V**

Technical drawing

Light distribution

Additional product photos

Logistics data



Single packaging



Bulk packaging



Europallet

---

LED line PRIME

Code: 205826

EAN: 5905378205826

**LED line PRIME Panel Backlit 34W  
4000K 4760lm 595x595 0-10V**

---

**Example application**