


LEDOM E27 30W 4000K 3200lm 170-250V F100



Voltage range and voltage type

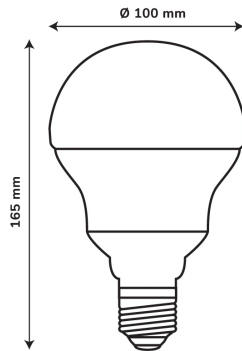

Lifespan




Beam angle



Parameter	Value
Luminous efficacy	90 lm/W
Power	30 W
Colour of the light	White
Energy efficiency class 2019/2015	F
Luminous flux	3200 lm
Correlated colour temperature	4000 K
Colour consistency in McAdam ellipses	≤6
Warranty (years)	2
Dimmable function	No
Survival factor	0.9
Lifetime L70B50	50 000
Supply voltage range and voltage type	220-240 AC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Lamp's diameter	100
Beam angle	180 °
Material (housing)	PVC
Lifespan	50000


Parameter	Value
Power Factor	0,5
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
Height	165 mm
EPREL ID	632 347
Date of first placement on the market	2015-03-01 00:14:05
Energy class	A+
Angle for useful luminous flux (EPREL)	Sphere 360 degrees
Is the product equipped with an integrated light source? (EPREL)	No
Non-directional or directional light source (EPREL)	NDLS
Is this product a light source? (EPREL)	Yes
Mains or non- mains light source (EPREL)	MLS
Connected light source (EPREL)	No
Colour-tuneable light source (EPREL)	No
R9 colour rendering index value (EPREL)	11
Total luminous flux (EPREL)	3 200
On-mode power P _{on} (EPREL)	30
Useful luminous flux Φ _{use} (EPREL)	3 200
Beam angle in degrees (EPREL)	180

Single packaging




102
110
102
0,35
1

Bulk packaging



25

Europallet



2