


LED line PRIME

Code: 201255-CAW3HAT

EAN: 5905378217546

Backlit Panel 4000K 28W 4000lm IP20  
60x60cm white PRIME emergency  
module CAW 3h AT CNBOP

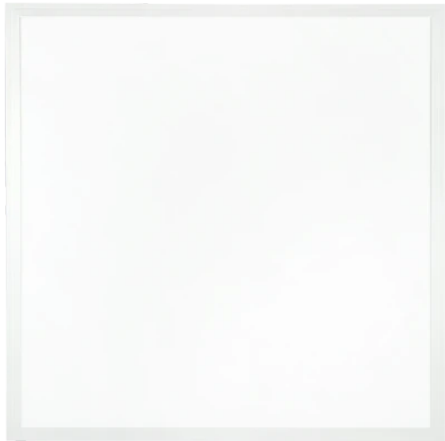

The 28 W PRIME LED line panel provides excellent lighting quality with a high luminous flux of 4000 lm. It is characterized by a neutral colour of light 4000 K, ideal for office and commercial spaces. With low flickering and 75,000-hour durability, it provides comfort of use and long-term operation.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 28 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	II
Luminous efficacy	142
Luminous flux	4000
The lumen maintenance factor	96
Lifetime L70B50	75 000 h
Survival factor	0.9
Dimmable function	PWM

Parameter	Value
Colour consistency in McAdam ellipses	≤3
Emergency module test	Auto test
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD LED 2835
LED quantity	96
Power Factor	0,9
Number of on/off cycles	25000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-25÷45
For indoor use	Inside
Colour	white
Material (housing)	Aluminium
Material (cover)	Polystyrene
EMERGENCY MODULE	• YES

LED line PRIME

Code: 201255-CAW3HAT

EAN: 5905378217546

Backlit Panel 4000K 28W 4000lm IP20  
60x60cm white PRIME emergency  
module CAW 3h AT CNBOP


Technical drawing

Light distribution

Additional product photos




Logistics data




Single packaging

Quantity	1
Width	600 mm
Height	31 mm
Length	673 mm
Weight	1,31 kg



Bulk packaging

Quantity	6
Width	630 mm
Height	670 mm
Length	240 mm
Volume	0,101 m3
Weight	8,16 kg
Comments	



Europallet

Quantity	72
Height	1340 mm
Quantity in layer	30
Number of layers	2
Bulk quantity	60
Weight	81,6 kg

LED line PRIME

Code: 201255-CAW3HAT

EAN: 5905378217546

**Backlit Panel 4000K 28W 4000lm IP20  
60x60cm white PRIME emergency  
module CAW 3h AT CNBOP**

**Example application**

