

LED line

Code: 470782

EAN: 5907777470782

LED line® High-Bay UFO 200W
150lm/W 4000K 1-10V 90° RAIDER



Technical data

Parameter	Value	Parameter	Value
Luminous efficacy	150 lm/W	LED type	SMD3030
Colour of the light	White	LED quantity	280
Energy efficiency class 2019/2015	C	Lifespan	100000
Luminous flux	30000 lm	Power Factor	0,95
Colour consistency in McAdam ellipses	≤6	Number of on/off cycles	50000
IP protection rating	IP65	Colour consistency in McAdam ellipses	≤6
Warranty (years)	5	Ambient temperature suitable for operation	-40÷45 °C
Dimmable function	1-10	For indoor and outdoor use	YES
Survival factor	0.9	IEC protection class	I
Lifetime L70B50	50 000	IK protection rating	08
Frequency of the supply voltage	50/60Hz	Full box quantity	1 pc
Colour rendering index Ra	70	Lamp's warm-up time to 60%	1
Colour	Black	Height	200 mm
The lumen maintenance factor	96 %	Energy class	A+
Lamp's diameter	280	Power	• 200 W
Beam angle	90 °	Voltage	• 100-277 V AC
Material (cover)	polycarbonate	Correlated colour temperature	• 4000 K
Material (housing)	aluminum		

LED line


Code: 470782

EAN: 5907777470782


LED line® High-Bay UFO 200W
150lm/W 4000K 1-10V 90° RAIDER

Dimensions


Light distribution



Additional product photos

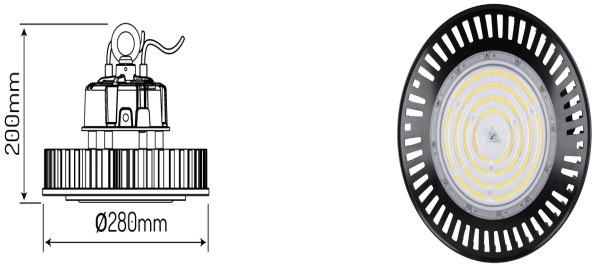


Logistics data




Single packaging

Width	345
Height	200 mm
Length	345 mm
Weight	3,77 kg
	1



Bulk packaging

Number of pieces/tape in meters pack zb	1
Width	345 mm
Height of collective packaging	200
Length	345 mm
Weight	3,77 kg
Volume	0,023 m3



Europallet

Number of pieces/tapes in meters euro pallet	48
Quantity collective euro pallet	48
Weight of a euro pallet	180,96 kg
Pallet height	1744
Quantity in 1 layer	6
Number of layers	8

LED line

Code: 470782

EAN: 5907777470782

**LED line® High-Bay UFO 200W
150lm/W 4000K 1-10V 90° RAIDER**

Example application