

LED line PRIME


Code: 475633

EAN: 5907777475633

LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V PC Cover 120°  
black



FUSION 20W linear housing from PRIME LED line is an advanced lighting solution, providing a light stream of 2600 lm and a colour temperature of 4000 K. It is characterized by high energy efficiency of 130 lm/W. Its aluminum design guarantees excellent heat discharge, which significantly prolongs life for a minimum of 50,000 hours. The holder supports the 0-10V brightness adjustment and has a light distribution angle of 120°.

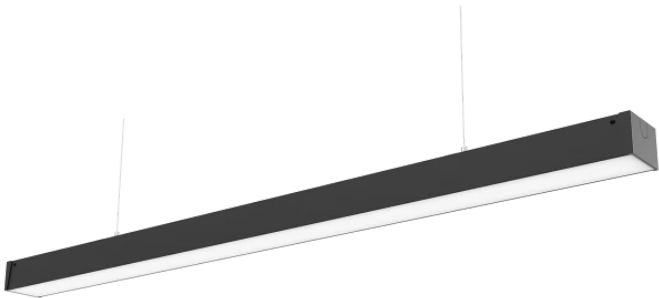

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600

Parameter	Value
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside

LED line PRIME

Code: 475633


EAN: 5907777475633

**LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V PC Cover 120°  
black**



**Technical drawing**




**Light distribution**

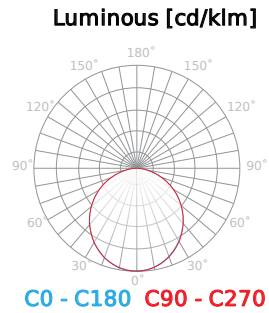


**Additional product photos**




**Logistics data**



**Single packaging**



**Bulk packaging**



**Europallet**

---

LED line PRIME

Code: 475633

EAN: 5907777475633

**LED line PRIME FUSION linear lamp  
20W 4000K 2600lm 0-10V PC Cover 120°  
black**

---

**Example application**