


LED line PRIME

Code: 475480

EAN: 5907777475480

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 30*90° black

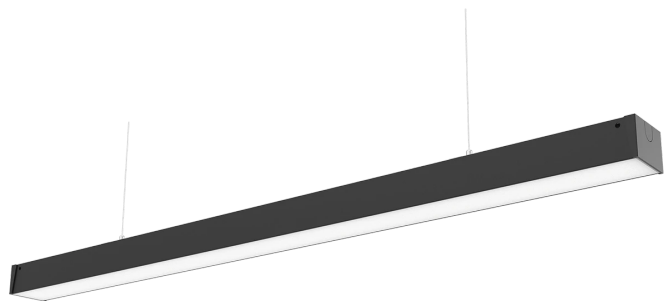

Technical data

Parameter	Value	Parameter	Value
Sling length	200	The lumen maintenance factor	96 %
Luminous efficacy	130 lm/W	Beam angle	30 x 90 °
Colour of the light	White	Power Factor	0,9
Energy efficiency class 2019/2015	C	Ambient temperature suitable for operation	-20÷45 °C
Luminous flux	2600 lm	For indoor use	Inside
Colour consistency in McAdam ellipses	≤6	IEC protection class	I
Standby power	0	IK protection rating	08
IP protection rating	IP20	Lamp's warm-up time to 60%	1
Warranty (years)	5	Length	586 mm
Survival factor	0.9	Width	70 mm
Lifetime L70B50	50 000	Height	52 mm
Mounting type	mixed	Power	• 20 W
Frequency of the supply voltage	50/60Hz	Voltage	• 220-240 V AC
Colour rendering index Ra	80	Correlated colour temperature	• 4000 K

LED line PRIME

Code: 475480

EAN: 5907777475480

LED line PRIME FUSION linear lamp
20W 4000K 2600lm 30*90° black




Dimensions

Light distribution

Additional product photos



Logistics data



Single packaging

Width	586 mm
Height	52 mm mm
Length	70 mm mm
Weight	1,14 kg kg

Bulk packaging

Number of pieces/tape in meters pack zb	12 szt.
Width	690 mm mm
Height of collective packaging	260 mm
Length	260 mm mm
Weight	13,93 kg kg
Volume	0,046 m3 m3

Europallet

Number of pieces/tapes in meters euro pallet	288
Quantity collective euro pallet	288 szt.
Weight of a euro pallet	672 kg kg
Pallet height	1710 mm
Quantity in 1 layer	48 szt.
Number of layers	6

LED line PRIME

Code: 475480

EAN: 5907777475480

**LED line PRIME FUSION linear lamp
20W 4000K 2600lm 30*90° black**

Example application