


## LED line® R7s 6W 2700K 500lm 220-240V 78mm



The structural design of this product ensures effective heat dissipation.

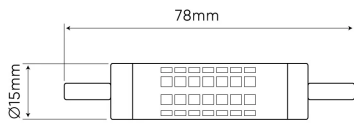

FLICKER FREE™ system guarantees no harmful flickering effect and ensures safety for users' eyesight.



Voltage range and voltage type



LED type



Manufacturer issues a 3-year warranty for this product.



Beam angle



Ambient temperature suitable for operation




Lifespan

Parameter	Value
Luminous efficacy	83 lm/W
Power	6 W
Colour of the light	White
Energy efficiency class 2019/2015	G
Luminous flux	500 lm
Correlated colour temperature	2700 K
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
Survival factor	0.9
Lifetime L70B50	30 000
Supply voltage range and voltage type	220-240 VAC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	white
The lumen maintenance factor	96 %
Lamp's diameter	15

Parameter	Value
Beam angle	360 °
Material (cover)	glass
Material (housing)	Ceramic
LED type	SMD2835
Lifespan	30000
Power Factor	0,5
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-20÷40 °C
For indoor use	Inside
Full box quantity	250 pc
Lamp's warm-up time to 60%	1
Height	78 mm
Product weight with packaging	22 g
Master carton weight (kg)	5,5
Energy class	A+

Luminous [cd/klm]

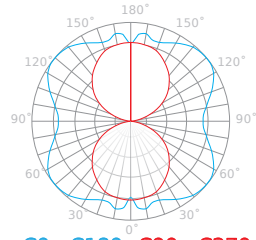

C0 - C180 C90 - C270

Single packaging




Width	20 mm
Height	90 mm
Length	20 mm
	1

Bulk packaging



Width	50
	240 mm
	150
Length	610 mm
Weight	5,3 kg
Volume	0,02196 m3

Europallet



Weight of a euro pallet	50
	265 kg
	1644
	5
	10