

LED line PRIME


Code: 476012

EAN: 5907777476012

**Linear luminaire FUSION 4000K 60W
7800lm 120*120° IP20 150cm black
PRIME**



The 60W LED line PRIME FUSION linear luminaire and 4000K light colour provides an impressive light stream of 7,800 lumens. With a wide light angle of 120° and a light efficiency of 130 lm/W, it perfectly dissipates light in space. Made of Aluminium, it provides excellent heat draining and long life up to 50,000 hours.

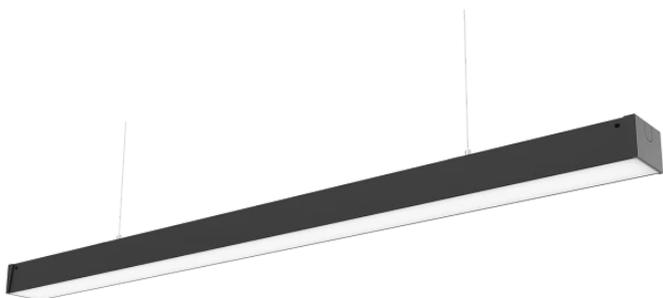

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* - difference B10-B50 ≈ 1% (according to LightingEurope) - negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 476012


EAN: 5907777476012

**Linear luminaire FUSION 4000K 60W
7800lm 120*120° IP20 150cm black
PRIME**

Technical drawing






Light distribution

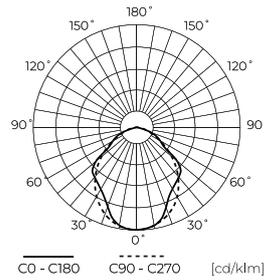

Additional product photos



Logistics data



Single packaging

Width	1444 mm
Height	125 mm
Length	70 mm
Weight	1,97 kg

Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	120 mm
Volume	0,048 m3
Weight	23,89 kg
Comments	

Europallet

Quantity	144
Height	1820 mm
Quantity in layer	12
Number of layers	7
Bulk quantity	12
Weight	25 kg

LED line PRIME

Code: 476012

EAN: 5907777476012

**Linear luminaire FUSION 4000K 60W
7800lm 120*120° IP20 150cm black
PRIME**

Example application