


LED line PRIME

Code: 249181-DALI

EAN: 5905378219977

**Frame panel 4000K 40W 3200lm IP20
60x60cm square PRIME DALI**

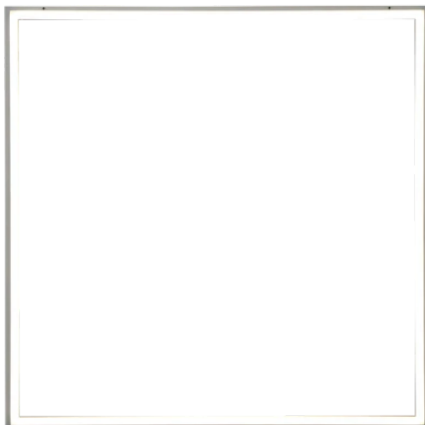

The LED line PRIME panel with a power of 40W 4000K provides a high luminous flux of 3200 lumens, which translates to effective lighting of the space. Made of aluminum and polycarbonate, it is characterized by durability and a modern square design. With a beam angle of 120° and a high color rendering index Ra of 80, it offers extremely natural and pleasant light.

DALI version.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	5
Power	• 40 W
Voltage	• 175-250 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	02
IEC protection class	II
Luminous efficacy	80
Luminous flux	3200
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9
Dimmable function	Dali

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD2835
LED quantity	300
Power Factor	≥0,95
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-5÷40
For indoor use	Inside
Installation method	recessed
Height	12 mm
Colour	white
Material (housing)	Aluminium
Material (cover)	Polycarbonate
DALI	• YES

LED line PRIME

Code: 249181-DALI

EAN: 5905378219977

**Frame panel 4000K 40W 3200lm IP20
60x60cm square PRIME DALI**




Technical drawing

Light distribution

Additional product photos



Logistics data



Single packaging

Quantity	1
Width	591 mm
Height	12 mm
Length	591 mm
Weight	0,65 kg

Bulk packaging

Quantity	10
Width	630 mm
Height	335 mm
Length	635 mm
Volume	0,134 m ³
Weight	7 kg

Europallet

Quantity	60
Height	1905 mm
Quantity in layer	30
Number of layers	3
Bulk quantity	90
Weight	70 kg

LED line PRIME

Code: 249181-DALI

EAN: 5905378219977

**Frame panel 4000K 40W 3200lm IP20
60x60cm square PRIME DALI**

Example application