

LED line PRIME


Code: 249181-DALI

EAN: 5905378219977

Frame panel 40W 4000K 3200lm 60x60 square PRIME



New

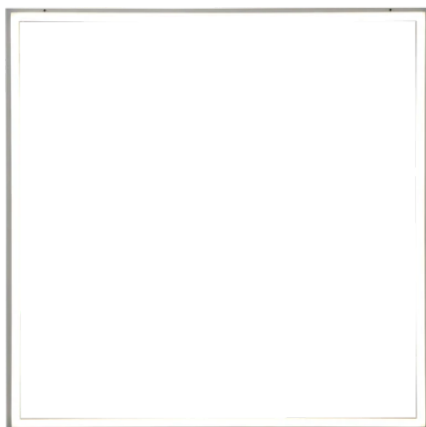

The 40W 4000K LINE PRIME LED panel provides a high light stream of 3200 lumens, which translates into effective space lighting. Made of aluminium and polycarbonate, it is characterized by durability and modern design in square format. Thanks to the light angle of 120° and the high colour reproduction coefficient of 80 Ra, it offers extremely natural and pleasant light.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Energy class	A++
Warranty	5
Power	• 40 W
Voltage	• 175-250 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	II
Luminous efficacy	80
Luminous flux	3200
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD2835
LED quantity	300
Power Factor	0,9
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-5÷45
For indoor use	Inside
Installation method	recessed
Colour	white
Material (housing)	Aluminium
Material (cover)	Polycarbonate

LED line PRIME

Code: 249181-DALI

EAN: 5905378219977

**Frame panel 40W 4000K 3200lm 60x60
square PRIME**

Technical drawing

Light distribution

Additional product photos

Logistics data



Single packaging



Bulk packaging



Europallet

LED line PRIME

Code: 249181-DALI

EAN: 5905378219977

**Frame panel 40W 4000K 3200lm 60x60
square PRIME**

Example application