


LED line PRIME



Code: 220232

EAN: 5905378220232

Linear luminaire FUSION 3000K 40W
5000lm 120° IP20 120cm black PRIME PC
Cover

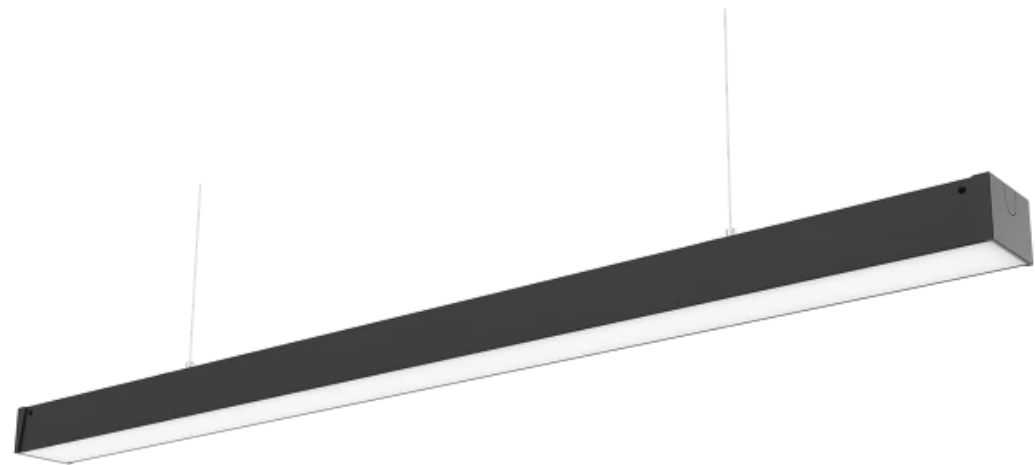

The LED line PRIME FUSION linear fixture with a power of 40W is characterized by high luminous efficiency. Made of durable aluminum, it ensures excellent heat dissipation and long-lasting operation of up to 50,000 hours. The IP20 protection class guarantees adequate internal protection, while the light distribution angle of 120° allows for even illumination of the space. The product warranty is 5 years.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	125
Luminous flux	5000
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	120
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52 mm


LED line PRIME

Code: 220232


EAN: 5905378220232

Linear luminaire FUSION 3000K 40W
5000lm 120° IP20 120cm black PRIME PC
Cover

Technical drawing




Light distribution

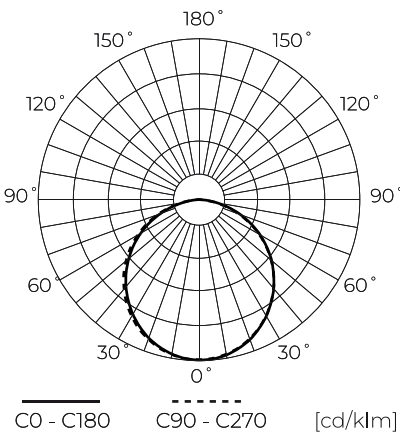

Additional product photos




Logistics data




Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg



Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	18,6 kg
Comments	



Europallet

Quantity	144
Height	1,6 m
Quantity in layer	144
Number of layers	1
Bulk quantity	12
Weight	248 kg

LED line PRIME

Code: 220232

EAN: 5905378220232

**Linear luminaire FUSION 3000K 40W
5000lm 120° IP20 120cm black PRIME PC
Cover**

Example application