

LED line PRIME


Code: 207813

EAN: 5905378207813

**Linear luminaire EXECULINE 4000K  
30W 3750lm 96° IP20 120cm black  
PRIME**



The EXECULINE 30W 4000K 3750lm linear fixture is a high-quality product from the LED line PRIME brand, which is perfect for various interiors. It features a length of 120 cm and a beam angle of 96°, ensuring effective lighting of the space. It emits a white light color with a temperature of 4000 K, guaranteeing natural color reproduction with a color rendering index Ra of 80.

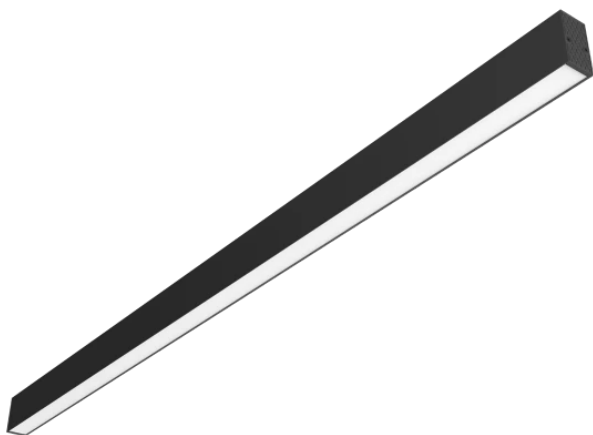

**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5
Power	• 30 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	09
IEC protection class	I
Luminous efficacy	125
Luminous flux	3750
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤3
Sling length	100 cm
Mounting type	suspended
Frequency of the supply voltage	50/60Hz
Beam angle	96
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-15÷45
For indoor use	Inside
Height	60 mm
Material (housing)	Aluminium
Material (cover)	Polycarbonate


LED line PRIME

Code: 207813


EAN: 5905378207813

**Linear luminaire EXECULINE 4000K  
30W 3750lm 96° IP20 120cm black  
PRIME**


**Technical drawing**



**Light distribution**

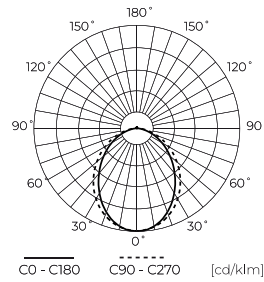

**Additional product photos**

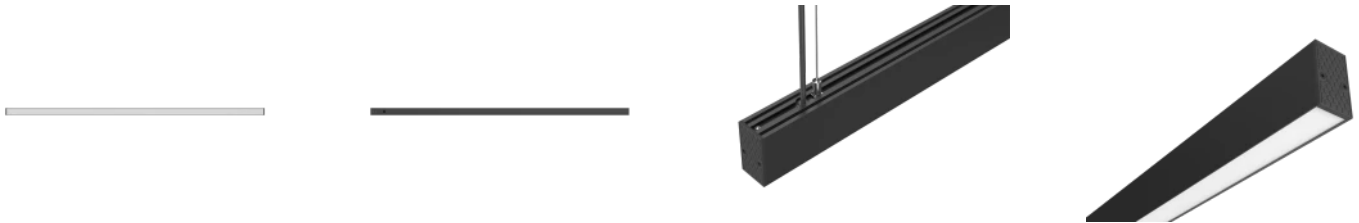

**Logistics data**



**Single packaging**

Quantity	1
Width	1250 mm
Height	82 mm
Length	41 mm
Weight	1,312 kg

**Bulk packaging**

Quantity	10
Width	220 mm
Height	180 mm
Length	1260 mm
Volume	0,049 m3
Weight	14 kg
Comments	0,144

**Europallet**

Quantity	120
Height	1,90 m
Quantity in layer	
Number of layers	
Bulk quantity	12
Weight	200 kg

LED line PRIME

Code: 207813

EAN: 5905378207813

**Linear luminaire EXECULINE 4000K  
30W 3750lm 96° IP20 120cm black  
PRIME**

**Example application**

