

LED line LITE

Code: 203938

EAN: 5905378203938

Backlit Panel 2in1 4000K 40W 4000lm
IP20 60x60cm black Surface-
mounted/Recessed LITE



The Backlit Panel 2in1 40W 4000K 4000LM from LED line LITE is an innovative lighting fixture that provides high luminous efficiency at a level of 100 lm/W. Thanks to the use of SMD LED diodes and a sturdy housing made of metal and polystyrene, the fixture guarantees durability and stability for at least 30,000 hours of operation. The IP20 protection class and the absence of flicker make it a safe choice for interiors.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	02
IEC protection class	I
Luminous efficacy	100
Luminous flux	4000
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	30 000 h
Survival factor	0.9
Dimmable function	PWM
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	120
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Height	38 mm
Material (housing)	Metal
Material (cover)	Polystyrene


LED line LITE

Code: 203938


EAN: 5905378203938

Backlit Panel 2in1 4000K 40W 4000lm
IP20 60x60cm black Surface-
mounted/Recessed LITE

Technical drawing

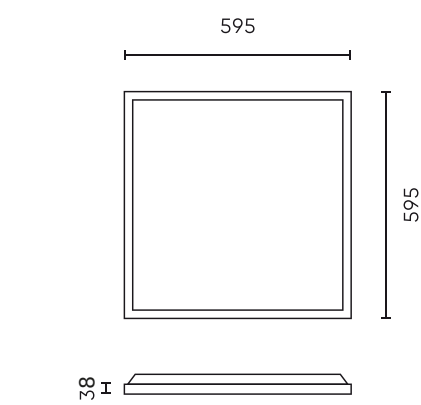


Light distribution

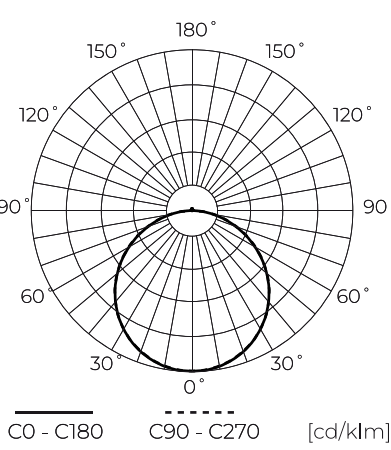

Additional product photos




Logistics data




Single packaging

Width	605 mm
Height	45 mm
Length	605 mm
Weight	1,37 kg



Bulk packaging

Quantity	6
Width	300 mm
Height	625 mm
Length	625 mm
Volume	0,117 m3
Weight	11,1 kg



Europallet

Height	1860 mm
Quantity in layer	24
Number of layers	3
Bulk quantity	72
Weight	102,24 kg

LED line LITE

Code: 203938

EAN: 5905378203938

**Backlit Panel 2in1 4000K 40W 4000lm
IP20 60x60cm black Surface-
mounted/Recessed LITE**

Example application