


LED line® Panel Easy Fix 6W 4000K
470lm square

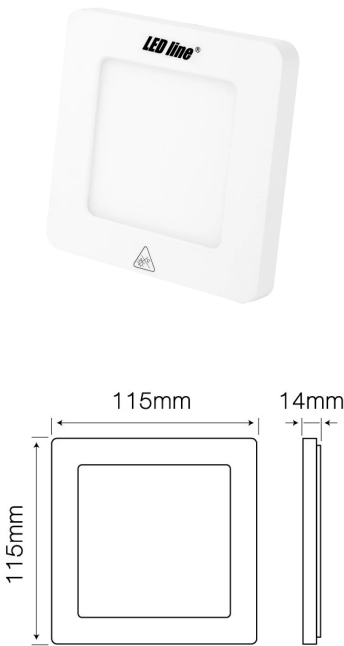

-

Mounting clips can be moved along the mounting bracket allowing the product to fit into most existing mounting holes.
- 3-year warranty

Manufacturer issues a 3-year warranty for this product.
- possible installation methods: recessed and surface. The installation method can be adjusted to the individual's needs.

FLICKER FREE™ system guarantees no harmful flickering effect and ensures safety for users' eyesight.
- YELLOW FREE™

Yellow free technology means that the housing of this product is made of high quality material which is resistant to yellowing degeneration caused by UV radiation, thanks to which the product maintains its easthetic appearance for many years.

Reliable photometric files are available based on photometric tests performed at the LED line® Light Research and Measurement Centre.
- voltage
220-260 AC

Voltage range and voltage type

Beam angle
120 °

Beam angle
- MAX
-5 ÷ 40 °C

Ambient temperature suitable for operation

LED type
SMD2835

LED type
- 30 000 h
L70B50

Lifespan

Mounting hole diameter
90 mm

Mounting hole diameter
- 8 lm/W
W

LED quantity
28


LED quantity

Parameter	Value
Luminous efficacy	78 lm/W
Power	6 W
Colour of the light	White
Energy efficiency class 2019/2015	E
Luminous flux	470 lm
Correlated colour temperature	4000 K
Colour consistency in McAdam ellipses	≤6
IP protection rating	20
Warranty (years)	3
Dimmable function	No
Survival factor	0.9
Lifetime L70B50	30 000
Supply voltage range and voltage type	220-260 AC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	white


Parameter	Value
Ambient temperature suitable for operation	-5 ÷ 40 °C
Mounting hole diameter	55-90 mm
For indoor use	Inside
IEC protection class	II
Full box quantity	60 pc
Lamp's warm-up time to 60%	1
Length	115 mm
Width	115 mm
Height	14 mm
Product weight with packaging (g)	295 g
Master carton weight (kg)	17,7
EPREL ID	632 209
Date of first placement on the market	01.11.2020
Energy class	A++
Form of the product (EPREL)	Source Out
Angle for useful luminous flux (EPREL)	Sphere 360 degrees

The lumen maintenance factor	96
Beam angle	120 °
LGP	GLASS
Material (cover)	polystyrene
Material (housing)	Polyamid
LED type	SMD2835
LED quantity	28
Lifespan	30000
Power Factor	0,5
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6

Is the product equipped with an integrated light source? (EPREL)	Yes
Non-directional or directional light source (EPREL)	NDLS
Is this product a light source? (EPREL)	No
Mains or non- mains light source (EPREL)	MLS
Connected light source (EPREL)	No
Colour-tuneable light source (EPREL)	No
R9 colour rendering index value (EPREL)	3
Total luminous flux (EPREL)	690
On-mode power Pon (EPREL)	6
Useful luminous flux Φuse (EPREL)	690
Beam angle in degrees (EPREL)	120




Single packaging




122
132
40
0,17
1

Bulk packaging



60

Europallet



8