

LED line PRIME

Code: 204249

EAN: 5905378204249

**Linear luminaire FUSION 4000K 60W  
7800lm 90°\*110° IP20 150cm white  
PRIME**



The 60W and 4000K FUSION linear luminaire, emitting a light stream of 7800 lumens, is the ideal solution to achieve uniform lighting in various spaces. The use of efficient lenses allows for precise adjustment of the light distribution angle in the range 90°-110°. Careful aluminium production ensures optimal heat removal and long life.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 204249

EAN: 5905378204249


**Linear luminaire FUSION 4000K 60W  
7800lm 90\*110° IP20 150cm white  
PRIME**

**Technical drawing**






**Light distribution**

**Additional product photos**

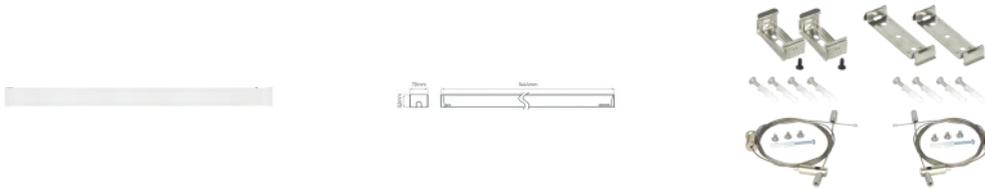

**Logistics data**



**Single packaging**

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

**Bulk packaging**

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

**Europallet**

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

---

LED line PRIME

Code: 204249

EAN: 5905378204249

**Linear luminaire FUSION 4000K 60W  
7800lm 90\*110° IP20 150cm white  
PRIME**

---

Example application