

LED line PRIME

Code: 202535

EAN: 5905378202535

FLOODLIGHT 4000K 200W 28000lm T3
IP66 PRIME



The PRIME Floodlight 200W LED line is a device with high light performance, reaching 28000 lumens at 140 lm/W efficiency. Its aluminium and tempered glass design provides excellent durability and resistance to atmospheric conditions, meeting IP66 standard. Designed for intensive use, it works at temperatures from -40 to 45°C.

5
WARRANTY

7
WARRANTY

IP
66

IK
08

PF
0,9

MAX
-40÷45°C

Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5/7*
Power	• 200 W
Voltage	• 100-277 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	70
IP protection rating	IP66
IEC protection class	I
Luminous efficacy	140
Luminous flux	28000
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h

Parameter	Value
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Wire length	1 050 mm
Mounting type	surface
Frequency of the supply voltage	50/60Hz
Beam angle	105°/155
LED type	SMD2835
LED quantity	360
Power Factor	0,9
Number of on/off cycles	50000
Ambient temperature suitable for operation	-40÷45
Height	52 mm
Material (housing)	Aluminium
Material (cover)	Tempered glass


LED line PRIME

Code: 202535


EAN: 5905378202535

FLOODLIGHT 4000K 200W 28000lm T3
IP66 PRIME

Technical drawing

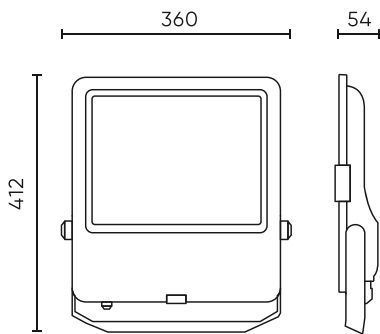




Light distribution

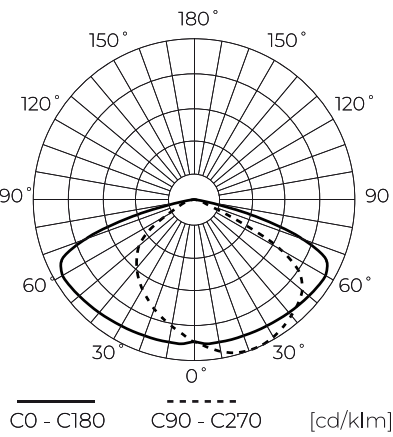

Additional product photos



Logistics data



Single packaging

Width	420 mm
Height	80 mm
Length	450 mm
Weight	4,21 kg

Bulk packaging

Quantity	1
Width	420 mm
Height	80 mm
Length	450 mm
Volume	0,015 m3
Weight	4,21 kg
Comments	

Europallet

Quantity	80
Height	1,9 m
Quantity in layer	
Number of layers	
Bulk quantity	80
Weight	370 kg

LED line PRIME

Code: 202535

EAN: 5905378202535

FLOODLIGHT 4000K 200W 28000lm T3
IP66 PRIME

Example application