


LED line PRIME

Code: 475602

EAN: 5907777475602

**Linear luminaire FUSION 4000K 20W
2600lm 120*120° IP20 60cm black PRIME**

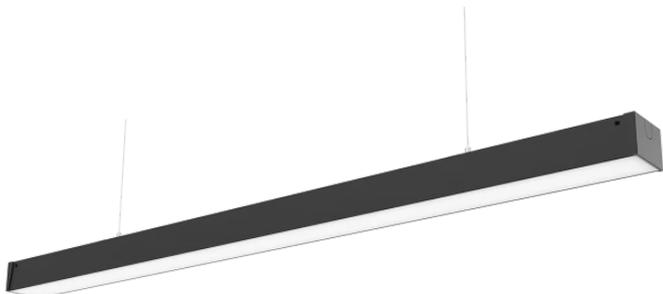

FUSION 20W linear mounting from LED line PRIME is a modern 20W and 2600 lm light stream solution. It is characterized by a colour temperature of 4000 K and a wide angle of light distribution of 120°. Made of durable aluminum, it provides excellent heat draining, which increases its durability to 50,000 hours. IP20 and IK08 leak class guarantee resistance to mechanical damage.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0.9
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 475602


EAN: 5907777475602

**Linear luminaire FUSION 4000K 20W
2600lm 120*120° IP20 60cm black PRIME**

Technical drawing





Light distribution

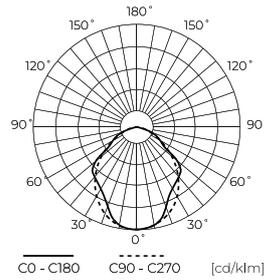

Additional product photos



Logistics data



Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 475602

EAN: 5907777475602

**Linear luminaire FUSION 4000K 20W
2600lm 120*120° IP20 60cm black PRIME**

Example application