


LED line PRIME

product_card.label_product_code: 475602
product_card.label_product_gtin: 5907777475602

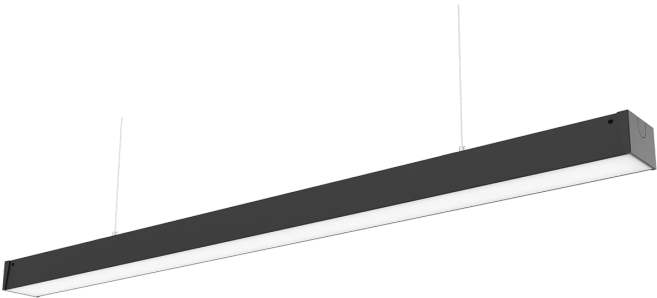

product_card.label_technical_data

product_card.label_attribute_name	product_card.label_attribute_value
Sling length	200
Luminous efficacy	130 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	C
Luminous flux	2600 lm
Colour consistency in McAdam ellipses	≤6
Standby power	0.9 uW
IP protection rating	IP20
Warranty (years)	5
Survival factor	0.9
Lifetime L70B50	50 000
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80

product_card.label_attribute_name	product_card.label_attribute_value
The lumen maintenance factor	96 %
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45 °C
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1
Length	586 mm
Width	70 mm
Height	52 mm
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K

LED line PRIME

product_card.label_product_code475602product_card.label_product_gtin:5907777475602




product_card.label_dimensions

product_card.label_curve_light

product_card.label_product_gallery



product_card.label_logistic_data



product_card.label_single_package

Width	586 mm
Height	52 mm mm
Length	70 mm mm
Weight	1,14 kg kg

product_card.label_collective_package

Number of pieces/tape in meters	12 szt.
Width	690 mm mm
Height of collective packaging	260 mm
Length	260 mm mm
Weight	13,93 kg kg
Volume	0,046 m3 m3

product_card.label_europalette

Number of pieces/tapes in meters	288
Quantity collective euro pallet	288 szt.
Weight of a euro pallet	672 kg kg
Pallet height	1710 mm
Quantity in 1 layer	48 szt.
Number of layers	6

LED line PRIME

product_card.label_product_code475602

product_card.label_product_gtin:5907777475602

product_card.label_realization_photo