

LED line PRIME

Code: 201279

EAN: 5905378201279

Hermetic luminaire LINKER 5000K 40W
6000lm IP65 120cm gray PRIME



LINKER 40W from LED line PRIME is characterized by high light performance of 6000 lm and a coefficient of 150 lm/W. It offers a neutral colour temperature of 5000 K, which provides excellent color reproduction ($Ra \geq 80$). Powered by 220-240V AC voltage, it has a hermetic design with IP65 leak class and IK08 impact resistance.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 5000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP65
IK protection rating	08
IEC protection class	I
Luminous efficacy	150
Luminous flux	6000
The lumen maintenance factor	96
Lifetime L70B50	100 000 h
L80B* – difference B10–B50 $\approx$ 1% (according to LightingEurope) – negligible	75000 h

Parameter	Value
L90B* – difference B10–B50 $\approx$ 1% (according to LightingEurope) – negligible	50000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤ 6
Frequency of the supply voltage	50/60Hz
Beam angle	120
Lifespan	100 000 h
Power Factor	≥ 0.95
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-25÷45
Height	61 mm
Colour	96
Material (housing)	Polycarbonate
Material (cover)	Polycarbonate

LED line PRIME


Code: 201279

EAN: 5905378201279


Hermetic luminaire LINKER 5000K 40W

6000lm IP65 120cm gray PRIME

Technical drawing




Light distribution

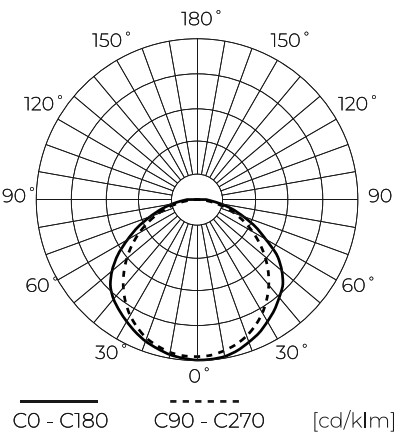

Additional product photos




Logistics data




Single packaging

Quantity	1
Width	75 mm
Height	65 mm
Length	1120 mm
Weight	1,29 kg



Bulk packaging

Quantity	15
Width	355 mm
Height	246 mm
Length	1238 mm
Volume	0,108 m3
Weight	19,9 kg



Europallet

Quantity	180
Height	1500 mm
Quantity in layer	
Number of layers	
Bulk quantity	12
Weight	263,8 kg

LED line PRIME

Code: 201279

EAN: 5905378201279

**Hermetic luminaire LINKER 5000K 40W
6000lm IP65 120cm gray PRIME**

Example application