

LED line PRIME

product_card.label_product_code: 201279
product_card.label_product_gtin: 5905378201279

LINKER TRI-PROOF 40W 5000K
150lm/W 220-240V IP65 120cm PRIME



product_card.label_technical_data

product_card.label_attribute_name	product_card.label_attribute_value
ULOR	3 %
Luminous efficacy	150 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	D
Luminous flux	6000 lm
Colour consistency in McAdam ellipses	≤6
IP protection rating	IP65
Warranty (years)	5
Survival factor	0.9
Lifetime L70B50	100 000
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	96
The lumen maintenance factor	96 pc
Beam angle	120 °
Material (cover)	polycarbonate
Material (housing)	Polycarbonate

product_card.label_attribute_name	product_card.label_attribute_value
Lifespan	100000
Power Factor	0,95
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-25÷45 °C
For indoor and outdoor use	YES
IEC protection class	II
IK protection rating	08
Full box quantity	4 pc
Lamp's warm-up time to 60%	1
Length	1180 mm
Width	72 mm
Height	61 mm
Power	40 W
Voltage	220-240 V AC
Correlated colour temperature	5000 K

LED line PRIME


product_card.label_product_code: 201279
product_card.label_product_gtin: 5905378201279

LINKER TRI-PROOF 40W 5000K
150lm/W 220-240V IP65 120cm PRIME




product_card.label_dimensions

product_card.label_curve_light

product_card.label_product_gallery

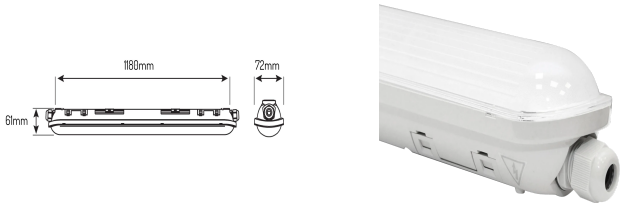

product_card.label_logistic_data



product_card.label_single_package

Width	1180 mm
Height	61 mm mm
Length	72 mm mm
Weight	1,13 kg kg

product_card.label_collective_package

Number of pieces/tape in meters pack zb	15 szt.
Width	1238 mm mm
Height of collective packaging	355 mm
Length	246 mm mm
Weight	17,3 kg kg
Volume	0,108 m3 m3

product_card.label_europalette

Number of pieces/tapes in meters euro pallet	150
Quantity collective euro pallet	135 szt.
Weight of a euro pallet	778,5 kg kg
Pallet height	1775 mm
Quantity in 1 layer	135 szt.
Number of layers	1

LED line PRIME

product_card.label_product_code: 201279 product_card.label_product_gtin: 5905378201279

LINKER TRI-PROOF 40W 5000K
150lm/W 220-240V IP65 120cm PRIME

product_card.label_realization_photo