

LED line LITE



Code: 209923

EAN: 5905378209923

LED line LITE Downlight EASY FLEX 6W
4000K 450lm round white



Downlight EASY FLEX 6W is a modern lighting luminaire with a neutral colour of light 4000 K, emitting a luminous flux of 450 lm. It is characterized by a round shape and a ratio of Ra color reproduction at level 80. At 6 W power, its luminous efficiency is 75 lm/W. The housing has IP20 leak class and IK05 load capacity, which provides adequate protection against damage.

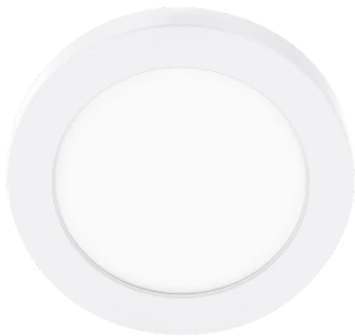

Technical data

Parameter	Value
Voltage	• 220-240 V AC
Luminous efficacy	75
Energy efficiency class 2019/2015	E
Luminous flux	450
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
IP protection rating	IP20
Survival factor	0.9
Lifetime L70B50	30 000 h
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	White
The lumen maintenance factor	96
Fixture's diameter	140

Parameter	Value
Beam angle	120
LED type	SMD2835
LED quantity	28
Number of on/off cycles	15000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-20 ÷ 40
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-102
IEC protection class	II
IK protection rating	05
Lamp's warm-up time to 60%	1 s
Correlated colour temperature	• 4000 K
Power	• 6 W

LED line LITE


Code: 209923

EAN: 5905378209923

**LED line LITE Downlight EASY FLEX 6W
4000K 450lm round white**

Technical drawing


Light distribution




Additional product photos




Logistics data



Single packaging



Bulk packaging



Europallet

LED line LITE

Code: 209923

EAN: 5905378209923

**LED line LITE Downlight EASY FLEX 6W
4000K 450lm round white**

Example application