


LED line® strip 600 SMD 24V 6500K 9,6W



Manufacturer issues a 5-year warranty for this product.

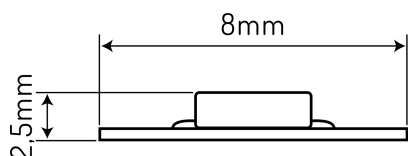

The colour temperature range of the product falls within 3 steps of MacAdam formula, which ensures high consistency of the produced light.



Voltage range and voltage type



LED type



LED quantity



Reliable photometric files are available based on photometric tests performed at the LED line® Light Research and Measurement Centre.



Beam angle



Ambient temperature suitable for operation



Lifespan




LED quantity (1m)

Parameter	Value
Luminous efficacy	100 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	F
Correlated colour temperature	6500 K
Colour consistency in McAdam ellipses	≤3
IP protection rating	20
Warranty (years)	5
Dimmable function	PWM
Survival factor	0.9
Minimum purchase quantity	5
Lifetime L70B50	30 000
Wire length	200 mm
Wattage (1m)	9,6 W
Luminous flux (1m)	960
Current (1m)	0,4
Supply voltage range and voltage type	24 VDC
Colour rendering index Ra	80
Metres per roll	5


Parameter	Value
The lumen maintenance factor	96 %
Beam angle	120 °
LED type	SMD 2835
LED quantity	600
Compatible dimmer type	PWM
Laminate (colour)	White
Laminate (thickness)	2
LED quantity (1m)	120
Cutting section	5
Type of adhesive tape	3M 300 LSE
Colour consistency in McAdam ellipses	≤3
Ambient temperature suitable for operation	-25÷45 °C
For indoor use	Inside
IEC protection class	III
Length	5000 mm
Width	8 mm
Height	2,5 mm

Luminous [cd/klm]




C0 - C180 C90 - C270

Single packaging




Bulk packaging



100

Europallet



Weight of a euro pallet

60
300 kg
1800
6
10