

LED line PRIME


Code: 475619

EAN: 5907777475619

**Linear luminaire FUSION 4000K 20W
2600lm LR40° IP20 60cm black PRIME**



FUSION 20W linear luminaire from LED PRIME line is characterized by modern design and high light efficiency of 130 lm/W. It emits a pleasant, neutral light with a colour temperature of 4000 K, which favors visual comfort. The solid aluminium body provides excellent heat draining and product longevity. Thanks to adjustable lenses and mounting possibilities in various configurations, the setting fits perfectly into a variety of interior arrangements.

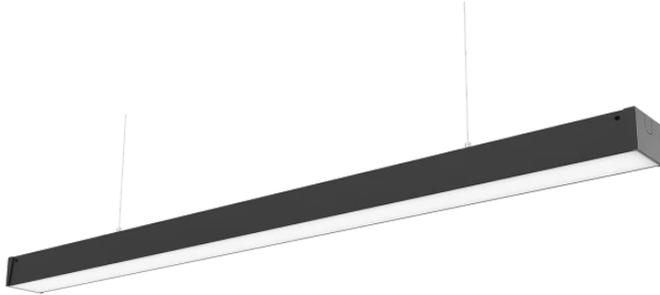

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	ReplByProf2+ReplByP
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 475619


EAN: 5907777475619

**Linear luminaire FUSION 4000K 20W
2600lm LR40° IP20 60cm black PRIME**

Technical drawing





Light distribution



Additional product photos



Logistics data



Single packaging

Width	586 mm
Height	34 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	120 mm
Volume	0,021 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1820 mm
Quantity in layer	48
Number of layers	7
Bulk quantity	336
Weight	415,04 kg

LED line PRIME

Code: 475619

EAN: 5907777475619

**Linear luminaire FUSION 4000K 20W
2600lm LR40° IP20 60cm black PRIME**

Example application