


LED line PRIME

Code: 475756

EAN: 5907777475756

**Linear luminaire FUSION 4000K 40W
5200lm 60*110° IP20 120cm black PRIME**

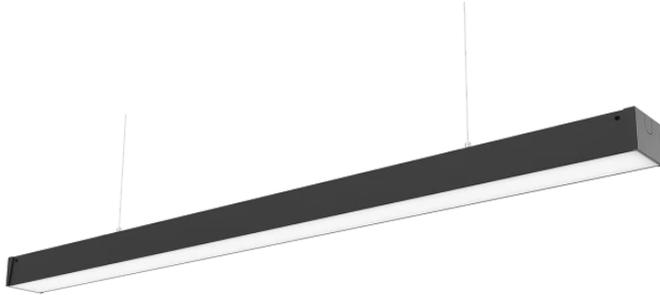

FUSION linear setting from LED line PRIME with a power of 40 W stands out with 130 lm/W efficiency, generating a light stream of 5200 lm. It has been designed with an even distribution of light due to a distribution angle of 60°*110°. High-quality aluminium allows efficient heat discharge, which translates into a long product life. It has a degree of protection IP20 and IK08, as well as provides excellent Ra color reproduction at level 80.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 475756


EAN: 5907777475756

**Linear luminaire FUSION 4000K 40W
5200lm 60*110° IP20 120cm black PRIME**

Technical drawing






Light distribution



Additional product photos



Logistics data



Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg

Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	22,09 kg
Comments	

Europallet

Quantity	288
Height	1260 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	265,2 kg

LED line PRIME

Code: 475756

EAN: 5907777475756

**Linear luminaire FUSION 4000K 40W
5200lm 60*110° IP20 120cm black PRIME**

Example application