

LED line PRIME

Code: 200371

EAN: 5905378200371

FLOODLIGHT 4000K 200W 28000lm 90°
IP66 PRIME



The 200W PRIME Floodlight LED line and light stream 28000 lm provides efficiency of 140 lm/W. It offers high class IP66 tightness, which guarantees resistance to difficult weather conditions. Its aluminium and tempered glass design ensures durability and excellent light scattering at a 90° lighting angle.

5
WARRANTY

7
WARRANTY

IP
66

IK
08

PF
0,9

MAX
-40÷45°C

Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5/7*
Power	• 200 W
Voltage	• 100-277 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	70
IP protection rating	IP66
IK protection rating	08
IEC protection class	I
Luminous efficacy	140
Luminous flux	28000
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h

Parameter	Value
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Wire length	1 050 mm
Mounting type	surface
Frequency of the supply voltage	50/60Hz
Beam angle	90
LED type	SMD2835
LED quantity	360
Power Factor	0,9
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-40÷45
Height	52 mm
Material (housing)	Aluminium
Material (cover)	Tempered glass


LED line PRIME

Code: 200371


EAN: 5905378200371

FLOODLIGHT 4000K 200W 28000lm 90°
IP66 PRIME

Technical drawing

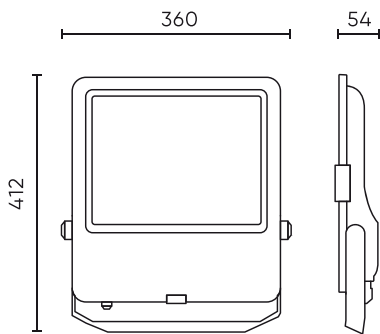




Light distribution

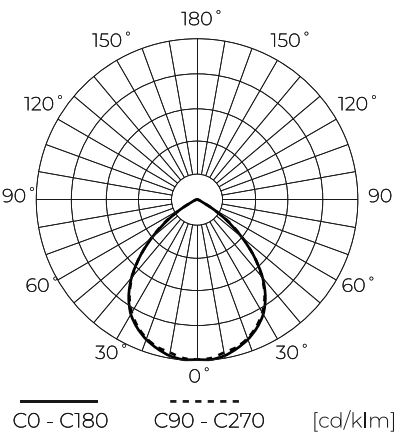

Additional product photos



Logistics data



Single packaging

Width	420 mm
Height	80 mm
Length	450 mm
Weight	4,21 kg

Bulk packaging

Quantity	1
Width	420 mm
Height	80 mm
Length	450 mm
Volume	0,015 m3
Weight	4,21 kg
Comments	

Europallet

Quantity	80
Height	1,9 m
Quantity in layer	
Number of layers	
Bulk quantity	80
Weight	370 kg

LED line PRIME

Code: 200371

EAN: 5905378200371

FLOODLIGHT 4000K 200W 28000lm 90°
IP66 PRIME

Example application