


LED line PRIME

Code: 205864

EAN: 5905378205864

LED line PRIME Panel Backlit 34W
4000K 4760lm UGR<19 595x595 0-10V

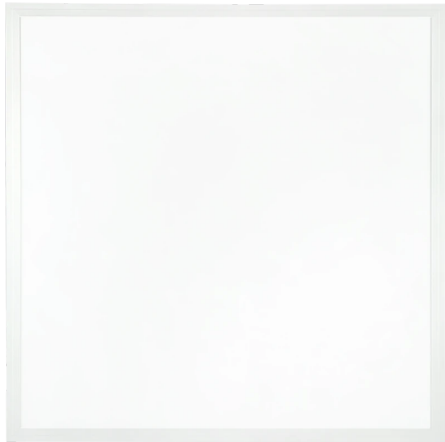

Technical data

Parameter	Value	Parameter	Value
Luminous efficacy	140 lm/W	Material (housing)	aluminum
Colour of the light	White	LED type	SMD LED 2835
Energy efficiency class 2019/2015	D	LED quantity	72
Luminous flux	4760 lm	Power Factor	0,9
Colour consistency in McAdam ellipses	≤6	Number of on/off cycles	50000
IP protection rating	IP20	Colour consistency in McAdam ellipses	≤6
Warranty (years)	5	Ambient temperature suitable for operation	-20÷40 °C
Dimmable function	0-10	For indoor use	Inside
Survival factor	0.9	IEC protection class	II
Lifetime L70B50	0	IK protection rating	02
Frequency of the supply voltage	50/60Hz	Lamp's warm-up time to 60%	1
Colour rendering index Ra	80	Height	30 mm
Colour	white	Power	• 34 W
The lumen maintenance factor	96 %	Voltage	• 200-240 V AC
Beam angle	90 °	Correlated colour temperature	• 4000 K
Material (cover)	polystyrene		

LED line PRIME

Code: 205864

EAN: 5905378205864


LED line PRIME Panel Backlit 34W
4000K 4760lm UGR<19 595x595 0-10V

Dimensions

Light distribution


Additional product photos

Logistics data




Single packaging

Width	30
Height	640 mm
Length	600 mm
Weight	1,53 kg
	1



Bulk packaging

Number of pieces/tape in meters pack zb	5
Width	170 mm
Height of collective packaging	655
Length	615 mm
Weight	10,4 kg
Volume	0,075 m3 m3



Europallet

Quantity collective euro pallet	60 szt.
Weight of a euro pallet	124,8 kg
Pallet height	1340 mm
Quantity in 1 layer	30 szt.
Number of layers	2

LED line PRIME

Code: 205864

EAN: 5905378205864

**LED line PRIME Panel Backlit 34W
4000K 4760lm UGR<19 595x595 0-10V**

Example application