LED line PRIME

Code: 228535

EAN: 5905378228535

LED NANO T8 G13 fluorescent tube 6500K 18W 2700lm 230V 270° 120cm PC PRIME



LED line Nano 150 lm/W is a breakthrough in energy-efficient lighting. With very high luminous efficacy, it provides exceptional brightness with minimal power consumption, allowing for maximum reduction in energy costs. Made from shatterproof material, it guarantees complete safety in workshops, warehouses, and schools. The **Flicker Free** standard (SVM < 0.01) eliminates flicker, protecting eyesight and ensuring the highest comfort of work. It is the perfect combination of durability, powerful light output, and care for users' health.

5 WARRANTY | IP 20 | 185-265V AC

Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5
Power	• 18 W
Voltage	• 185-265 V AC
Correlated colour temperature	• 6500 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
Luminous efficacy	150
Luminous flux	2700

Parameter	Value
Lifetime L70B50	50 000 h
Frequency of the supply voltage	50/60Hz
Beam angle	270
Power Factor	0,5
Number of on/off cycles	50000
Ambient temperature suitable for operation	"-20 ~ 45
For indoor use	Inside
Lamp's diameter	26 mm
Material (housing)	Polycarbonate

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line PRIME

Code: 228535

EAN: 5905378228535

LED NANO T8 G13 fluorescent tube 6500K 18W 2700lm 230V 270° 120cm PC PRIME

Technical drawing

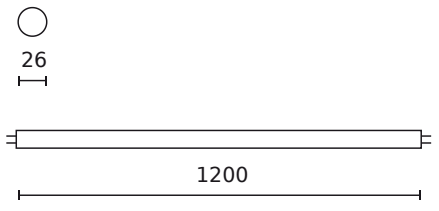

Light distribution

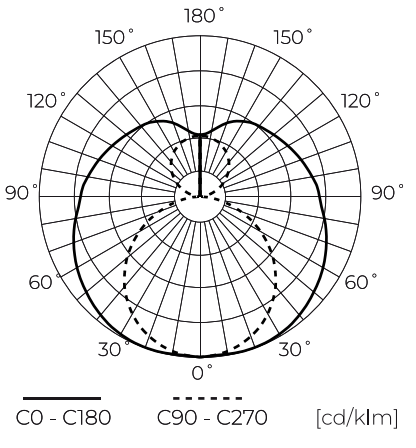

Additional product photos



Logistics data



Single packaging

Width	28 mm
Height	28 mm
Length	1220 mm
Weight	0,08 kg



Bulk packaging

Quantity	25
Width	175 mm
Height	175 mm
Length	1235 mm
Weight	3,0 kg



Europallet

Quantity	600
Height	1,3 m
Bulk quantity	25
Weight	100 kg

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line PRIME

Code: 228535

EAN: 5905378228535

LED NANO T8 G13 fluorescent tube 6500K 18W 2700lm 230V 270° 120cm PC PRIME

Example application



T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**