


## LED line PRIME Ceiling lamp ACTON 18W 2000lm 4000K IP54 square

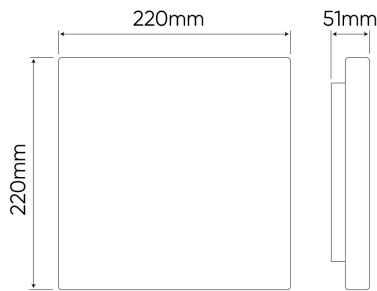

The simplicity of installation and high performance are only selected features thanks to which the ACTON ceiling lamp can add a new dimension to the lighting of many spaces. Thanks to the separation of the glowing part of the ceiling from the base, the lamps are easy to mount on the wall and ceiling. The light efficiency of 105-111lm/W, which distinguishes the fixtures in the segment of other ceiling lamps available on the market, is also noteworthy.

### Versatility and universality

The fixture gives the possibility of comfortable lighting both inside and outside buildings.

- Thanks to the power from 18 W to 24 W, it provides a wide range of lighting possibilities.
- The ACTON ceiling lamp is offered in two casing variants - round and square, allowing the choice of shape depending on individual preferences.
- The fixtures are also available in two color temperature versions 4000K (18W and 24W) and 3000K (18W).
- The ceiling lamp can be equipped with a microwave motion and dusk sensor with a 360-degree range within 8 meters, providing additional safety.

### Durable and aesthetic design

Simple and quick installation and maximum durability are other features that distinguish ACTON ceilings.

- The casing and shade are made of impact-resistant polycarbonate, which allows for safe operation outdoors (IP54) and provides excellent protection against mechanical damage (IK08).
- Thanks to the well-thought-out project, the ceilings are not only durable, but also aesthetic - they are characterized by a simple and elegant design, which makes them perfectly match various styles of arrangements.
- A high color rendering index (Ra>80) ensures natural lighting, which is scattered by the milky shade, creating a pleasant visual effect.

Opt for ACTON ceilings, which will not only illuminate your spaces but also add elegance and functionality to them. Take advantage of our offer and enjoy high-quality lighting for many years.



Yellow free technology means that the housing of this product is made of high quality material which is resistant to yellowing degeneration caused by UV radiation, thanks to which the product maintains its aesthetic appearance for many years.



FLICKER FREE™ system guarantees no harmful flickering effect and ensures safety for users' eyesight.



Manufacturer issues a 5-year warranty for this product.



Voltage range and voltage type



Beam angle



Ambient temperature suitable for operation



LED type



Lifespan



Parameter	Value	Parameter	Value
Luminous efficacy	110 lm/W	LED type	SMD2835
Power	18 W	Power Factor	0,9
Energy efficiency class 2019/2015	F	Colour consistency in McAdam ellipses	≤6

Luminous flux	2000 lm
Correlated colour temperature	4000 K
Colour consistency in McAdam ellipses	≤6
IP protection rating	54
Warranty (years)	5
Dimmable function	No
Survival factor	0.9
Lifetime L70B50	30 000
Weight	620 g
Supply voltage range and voltage type	220-240V AC
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	White
The lumen maintenance factor	96
Fixture's diameter	220
Beam angle	120 °
Material (cover)	polycarbonate
Material (housing)	Polycarbonate

Ambient temperature suitable for operation	-25 ÷ 40 °C
IEC protection class	II
IK protection rating	08
Lamp's warm-up time to 60%	1
Height	51 mm
Date of first placement on the market	01.06.2023
Angle for useful luminous flux (EPREL)	Sphere 360 degrees
Is the product equipped with an integrated light source? (EPREL)	No
Non-directional or directional light source (EPREL)	NDLS
Is this product a light source? (EPREL)	Yes
Mains or non- mains light source (EPREL)	MLS
Connected light source (EPREL)	No
Colour-tuneable light source (EPREL)	No
Total luminous flux (EPREL)	2 000
On-mode power $P_{on}$ (EPREL)	18
Useful luminous flux $\Phi_{use}$ (EPREL)	2 000
Beam angle in degrees (EPREL)	120

Single packaging




225  
58  
225  
0,7

Bulk packaging



20

Europallet



4