


LED line PRIME

Code: 475824

EAN: 5907777475824

FUSION 40W 4000K 5200lm P18° BLACK PRIME

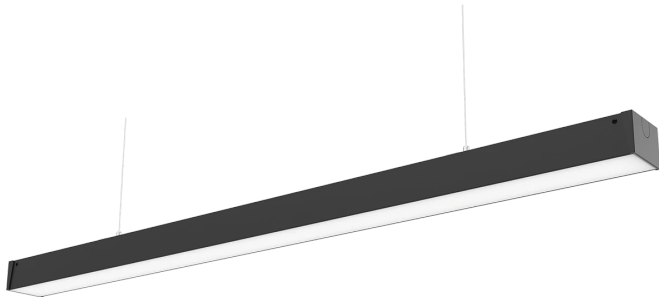

Technical data

Parameter	Value
Sling length	200
Luminous efficacy	130 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	C
Luminous flux	5200 lm
Colour consistency in McAdam ellipses	≤6
Standby power	0
IP protection rating	IP20
Warranty (years)	5
Survival factor	0.9
Lifetime L70B50	50 000
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80

Parameter	Value
The lumen maintenance factor	96 %
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45 °C
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1
Length	1158 mm
Width	70 mm
Height	52 mm
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K

LED line PRIME

Code: 475824

EAN: 5907777475824

FUSION 40W 4000K 5200lm P18° BLACK PRIME




Dimensions

Light distribution

Additional product photos



Logistics data



Single packaging

Width	1158 mm
Height	52 mm mm
Length	70 mm mm
Weight	1,82 kg kg

Bulk packaging

Number of pieces/tape in meters pack zb	12 szt.
Width	1260 mm mm
Height of collective packaging	260 mm
Length	260 mm mm
Weight	22,09 kg kg
Volume	0,085 m3 m3

Europallet

Number of pieces/tapes in meters euro pallet	144
Quantity collective euro pallet	144 szt.
Weight of a euro pallet	265,2 kg kg
Pallet height	1260 mm
Quantity in 1 layer	144 szt.
Number of layers	1

LED line PRIME

Code: 475824

EAN: 5907777475824

**FUSION 40W 4000K 5200lm P18° BLACK
PRIME**

Example application