


LED line PRIME

Code: 205987

EAN: 5905378205987

LED line PRIME Panel Backlit 25W
4000K 4000lm 595x595 0-10V

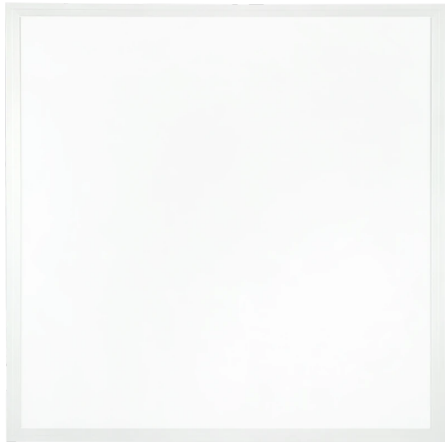

Technical data

Parameter	Value
Luminous efficacy	160 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	C
Luminous flux	4000 lm
Colour consistency in McAdam ellipses	≤6
IP protection rating	IP20
Warranty (years)	5
Dimmable function	0-10
Survival factor	0.9
Lifetime L70B50	0
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	white
The lumen maintenance factor	96 %
Beam angle	120 °
Material (cover)	polystyrene

Parameter	Value
Material (housing)	aluminum
LED type	SMD LED 2835
LED quantity	96
Power Factor	0,9
Number of on/off cycles	50000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-20÷40 °C
For indoor use	Inside
IEC protection class	II
IK protection rating	02
Lamp's warm-up time to 60%	1
Height	30 mm
Power	• 25 W
Voltage	• 200-240 V AC
Correlated colour temperature	• 4000 K

LED line PRIME

Code: 205987

EAN: 5905378205987


LED line PRIME Panel Backlit 25W
4000K 4000lm 595x595 0-10V

Dimensions

Light distribution


Additional product photos

Logistics data




Single packaging

Width	30
Height	645 mm
Length	605 mm
Weight	1,65 kg
	1



Bulk packaging

Number of pieces/tape in meters pack zb	5
Width	630 mm
Height of collective packaging	665
Length	635 mm
Weight	11,55 kg
Volume	0,084 m3



Europallet

LED line PRIME

Code: 205987

EAN: 5905378205987

**LED line PRIME Panel Backlit 25W
4000K 4000lm 595x595 0-10V**

Example application