

LED line PRIME


Code: 475732

EAN: 5907777475732

**Linear luminaire FUSION 4000K 40W
5200lm 120° IP20 120cm black PRIME PC
Cover**



The 40W and 5200 lm LED line housing PRIME FUSION has a high light efficiency of 130 lm/W. Made of durable aluminum, it provides excellent heat draining and long-term operation up to 50,000 hours. The IP20 leak class guarantees adequate internal protection, and the light distribution angle of 120° allows even space illumination. The warranty on the product is 5 years.

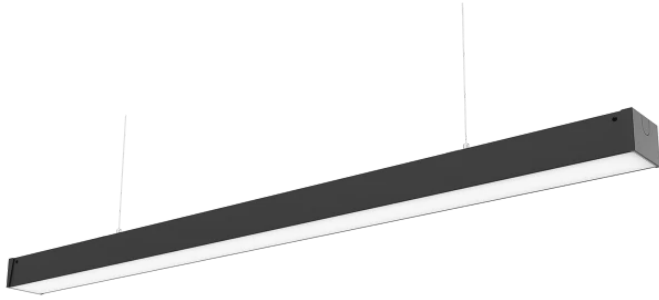

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	120
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52 mm


LED line PRIME

Code: 475732


EAN: 5907777475732

**Linear luminaire FUSION 4000K 40W
5200lm 120° IP20 120cm black PRIME PC
Cover**

Technical drawing



Light distribution



Additional product photos



Logistics data



Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg

Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	18,6 kg
Comments	

Europallet

Quantity	144
Height	1,6 m
Quantity in layer	144
Number of layers	1
Bulk quantity	12
Weight	248 kg

LED line PRIME

Code: 475732

EAN: 5907777475732

**Linear luminaire FUSION 4000K 40W
5200lm 120° IP20 120cm black PRIME PC
Cover**

Example application